



Atty. Dkt. No. 029319-0201

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: Jay A. Haines

Title: INFRARED REFLECTIVE WALL  
PAINT

Appl. No.: 10/811,065

Filing Date: 3/26/2004

Examiner: Alain Bashore

Art Unit: 1762

Conf. No.: 8080

CERTIFICATE OF MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as First Class Mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450, on the date below.	
<u>Vanessa E. Adair</u>	(Printed Name)
<u>Vanessa E. Adair</u>	(Signature)
<u>August 24, 2006</u>	(Date of Deposit)

**DECLARATION OF ANDRÉ DESJARLAIS UNDER 37 CFR 1.132**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

I, André Desjarlais, hereby declare as follows:

1. I hold the degree of B.S. in aeronautics from Boston University, conferred in 1973, and I have completed substantial coursework towards an M.S. at the Massachusetts Institute of Technology.
2. From 1975 until 1991, I was employed by the Dynatec company where my responsibilities focused on energy study consulting.
3. I am currently employed by the Oak Ridge National Laboratory of the United States Department of Energy in the position of Program Manager of the Building Envelope Group, which position I have held since 1991.
4. I am an expert in the field of architectural energy conservation by virtue of my training and professional research experience.

5. My laboratory engaged in a cooperative research project with Textured Coatings of America, Inc. in 2004 and 2005 to compare by actual field test the thermal performance of walls coated with Cool Wall (i.e., high infrared reflectance) as compared with standard colors, using Textured Coatings of America's Supercote Platinum and Supercote products. The term "standard colors" refers to paint which is not categorized as highly infrared reflective.

6. The results of that research,, entitled "Field Tests of Cool Walls in Cooling and Mixed Climates," are summarized in Exhibit 1 provided herewith. The project involved monitoring inside and outside temperatures and solar radiation levels of homes in various climates, and then using these data to make refined computer model simulations of the cooling costs associated with each site.

7. To summarize the results of this project, Exhibit 1 at page 47 provides the annual electricity burden for cooling the buildings of the model. The savings in energy to cool homes coated with infrared reflecting versus standard paint varied from 4-21.9%. The study concluded that using infrared reflective paint on the outside walls of homes results in a substantial increase in efficiency, relative to using paint which is not infrared reflective.


8. To reiterate, I was surprised at the magnitude of the savings afforded by the method of painting the exterior vertical walls of the test buildings with infrared reflective paint. In order to provide historical perspective to this study described in Exhibit 1, it must be understood that at the beginning of the cooperative research project (i.e., 2004) the collective wisdom in the field of architectural energy conservation dictated that the most efficient use of infrared-reflective paint would be on roofs. ~~The idea was discounted in the professional wisdom that simply coating the~~ exterior vertical walls of a building with an infrared-reflective paint could result in the significant energy savings which my group observed in the project summarized in Exhibit 1. The reason for the professional skepticism, and the resultant lack of research into exterior vertical wall infrared reflectance, is that the roof typically takes the majority of solar radiation impinging on a building. Prior to my laboratory's cooperative research project with Textured Coatings of America, Inc., I am not aware of any other work whatsoever directed to energy savings through heat-reflective

exterior vertical wall coatings. Thus, virtually all infrared-reflective coating research in the time period of 2004 was focused on roof coatings. I personally organized a seminar on the advantages of cool (i.e., heat reflective) roofing at the annual meeting of the American Society of Heating, Refrigerating and Air-Conditioning Engineers, held in Anaheim, CA, January 24-27, 2004.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information or belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the captioned patent application or any patent issued therefrom.

Respectfully submitted,

Date 10 Dec 06



André Desjarlais

**Exhibit 1: Field Tests of Cool Walls in Cooling and Mixed Climates, André Desjarlais,  
Progress Report on Joint Research Project, Textured Coatings of America and the Oak  
Ridge National Laboratory, 28 October 2005**



# **Field Tests of Cool Walls in Cooling and Mixed Climates**



**André Desjarlais**

**Progress Report on  
Joint Research Project**

**Textured Coatings of America  
and the  
Oak Ridge National Laboratory**

**28 October 2005**

**OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY**

# Quiz



With Comfort and Energy Efficiency in mind,  
which car do you select to drive in the  
Panama City during the summer?


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY




# Potential Answers

- The black car (!)
- The white car
- Pick the black car and move to Denmark
- Who cares about energy efficiency or comfort?

# Proof of Concept

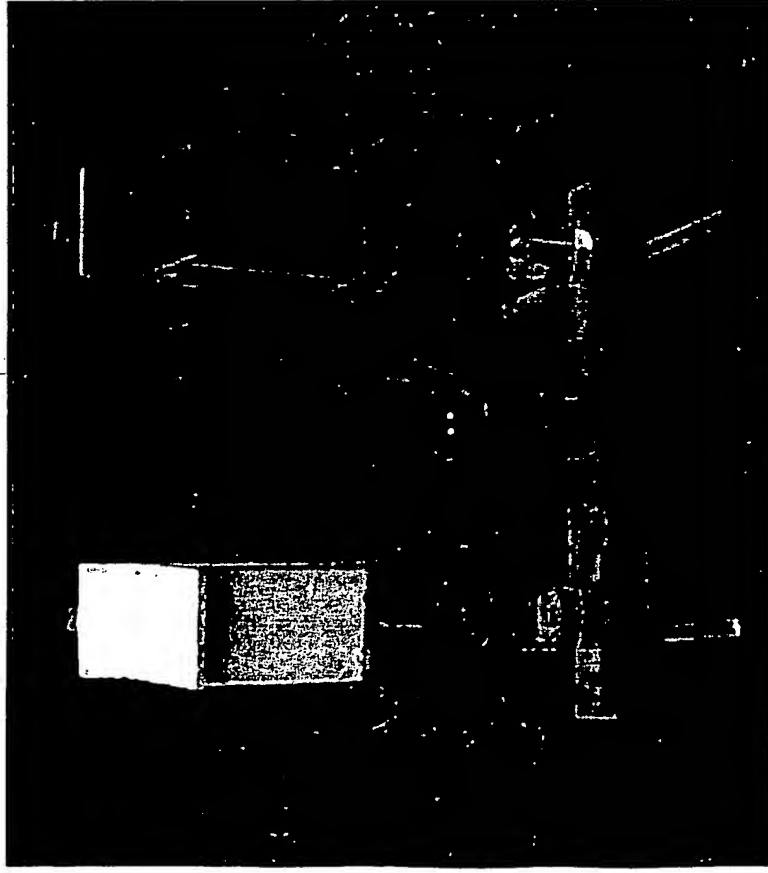


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

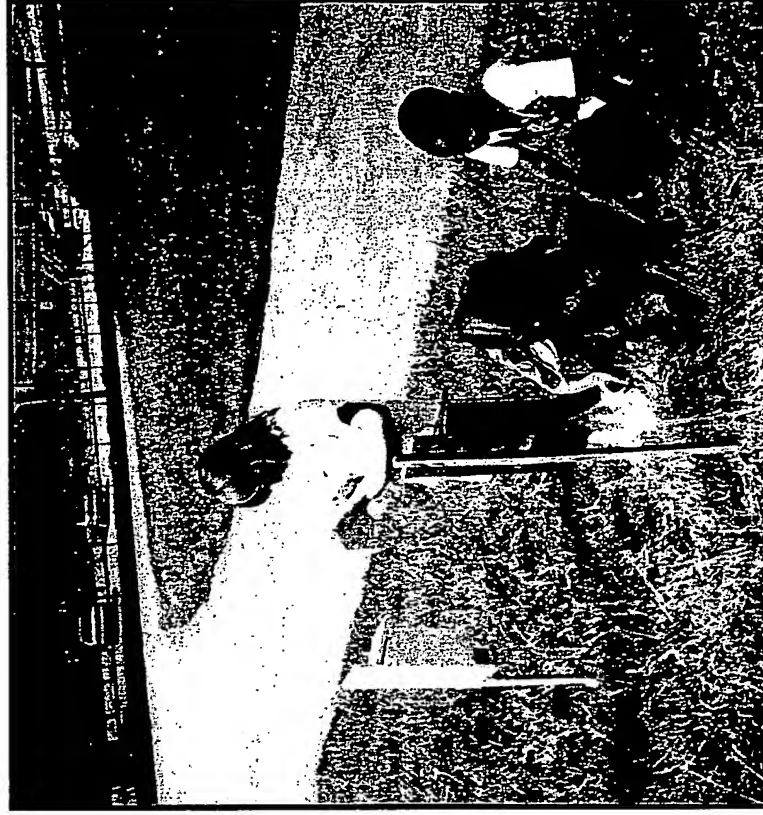

UT-BATTELLE



# Solar Energy Spectrum

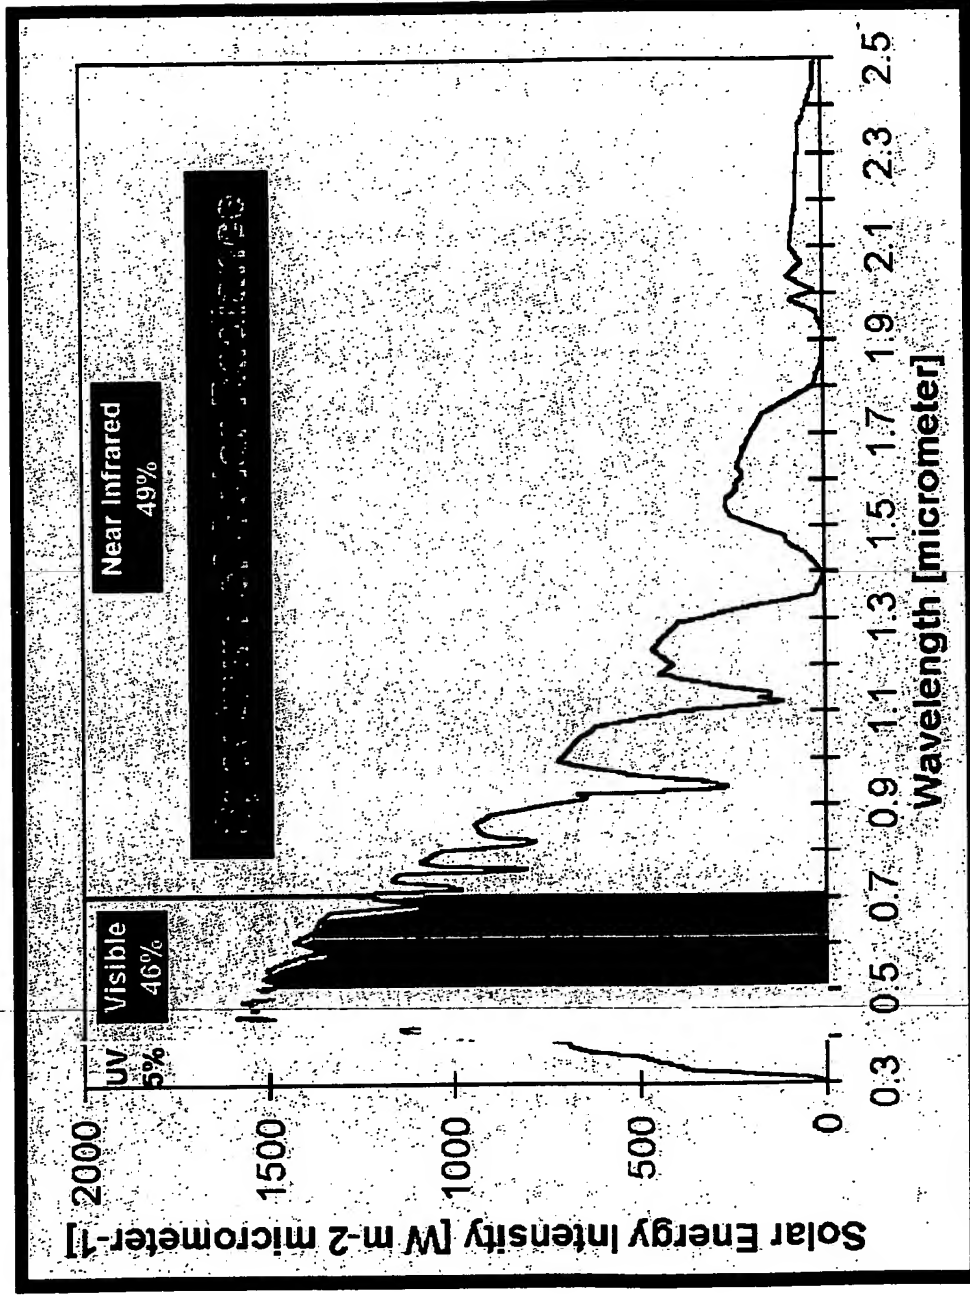

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Critical Properties


Reflectance ( $\rho_{\text{solar}}$ )

Emittance ( $\epsilon_{\text{IR}}$ )




OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# $\rho_{\text{solar}}$ and $\epsilon_{\text{IR}}$ are Both Very Important

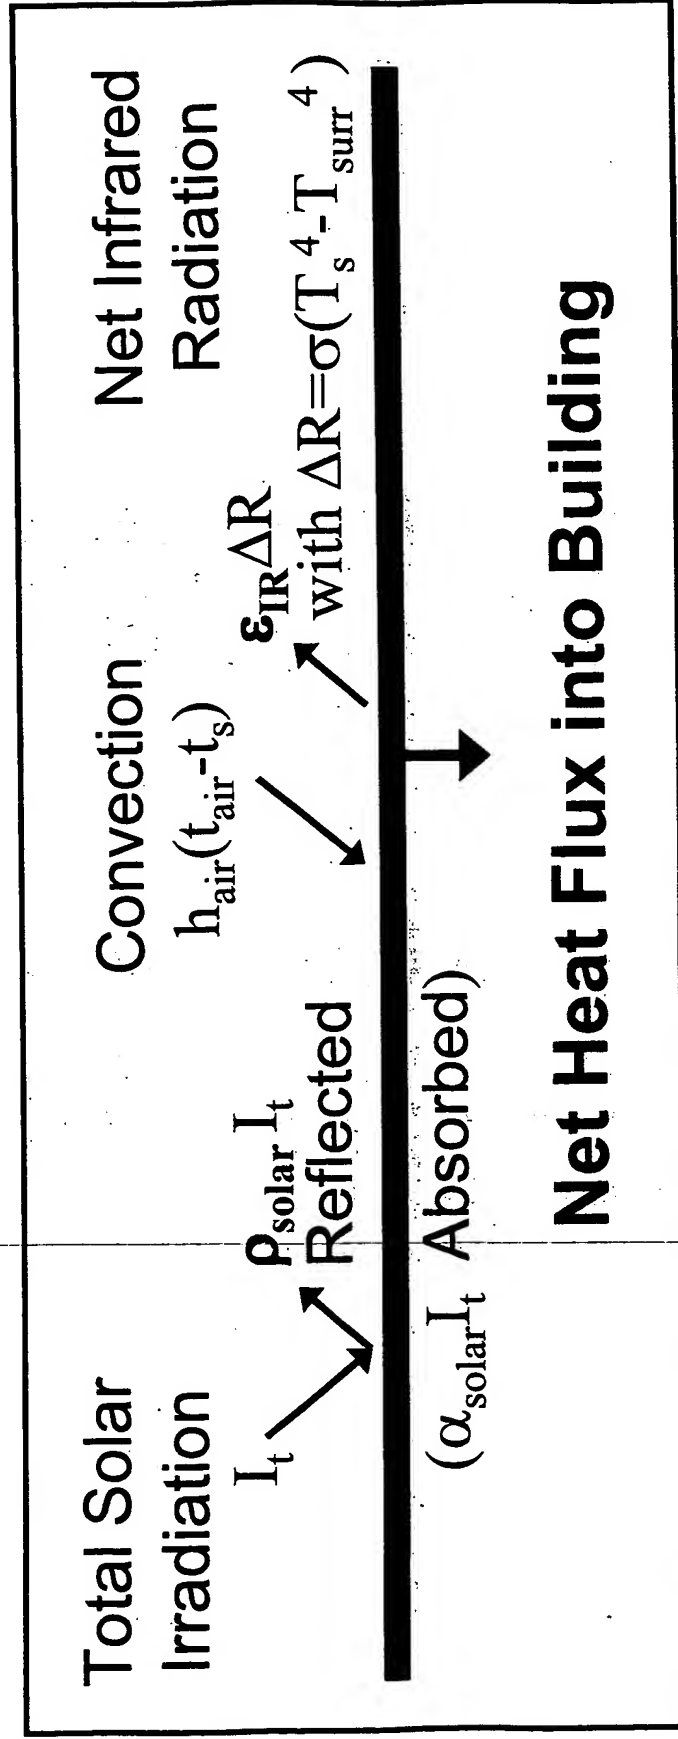

# Atlanta's Changing Environment

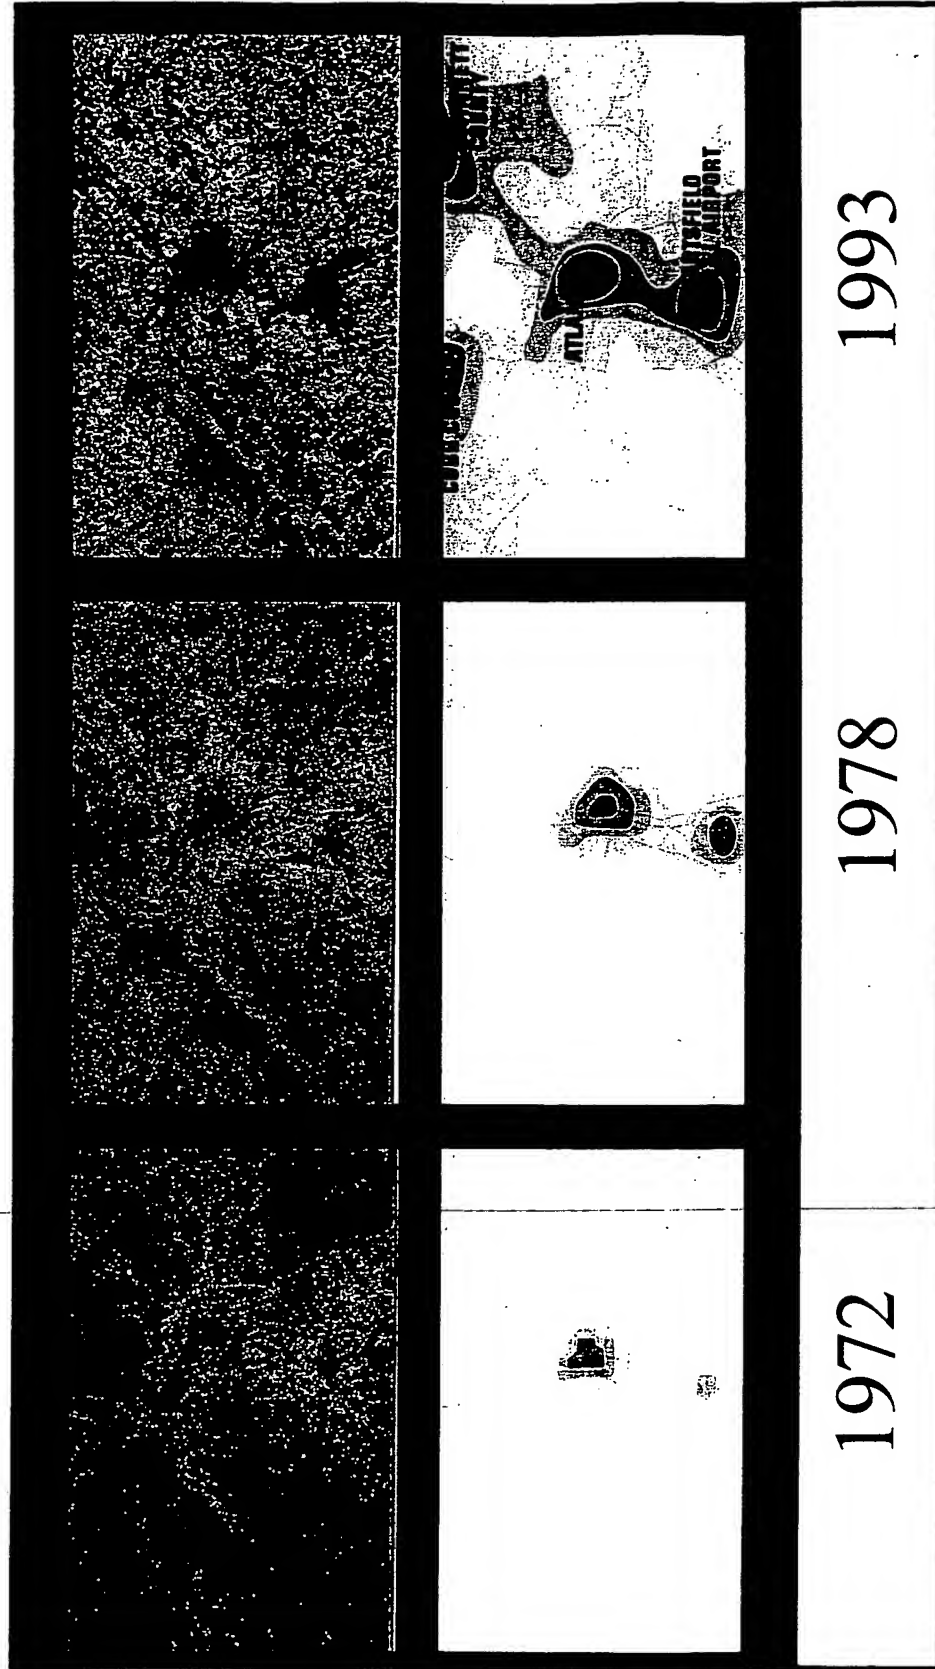


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# **Working with Industry Partners**


- Team with metal roof, single ply membrane, and roof coating associations and their members and Textured Coatings
- Federally co-funded

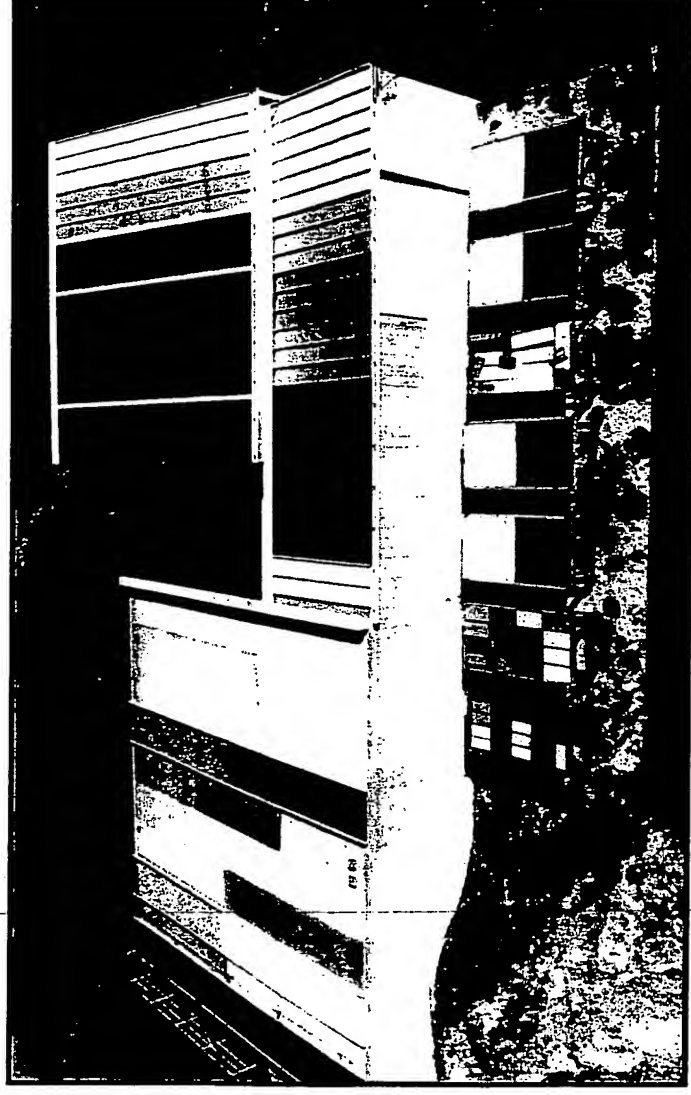


**OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY**

# Camouflage Invisible to Night Vision

Conventional Film

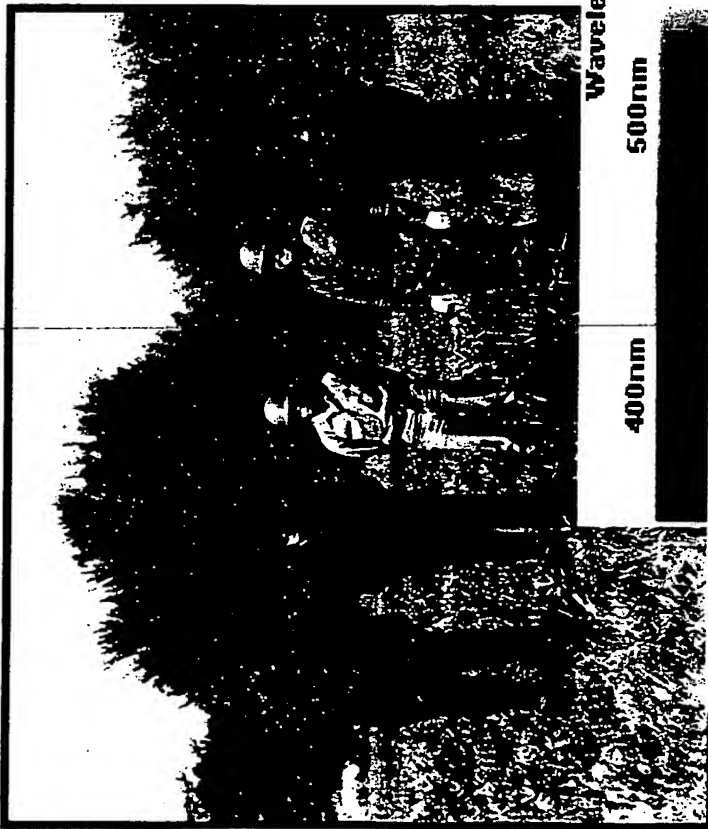

Near Infrared Film




← Shorter Wavelength

Longer Wavelength →

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

UT-BATTELLE


# Conventional vs. Infrared Pigments

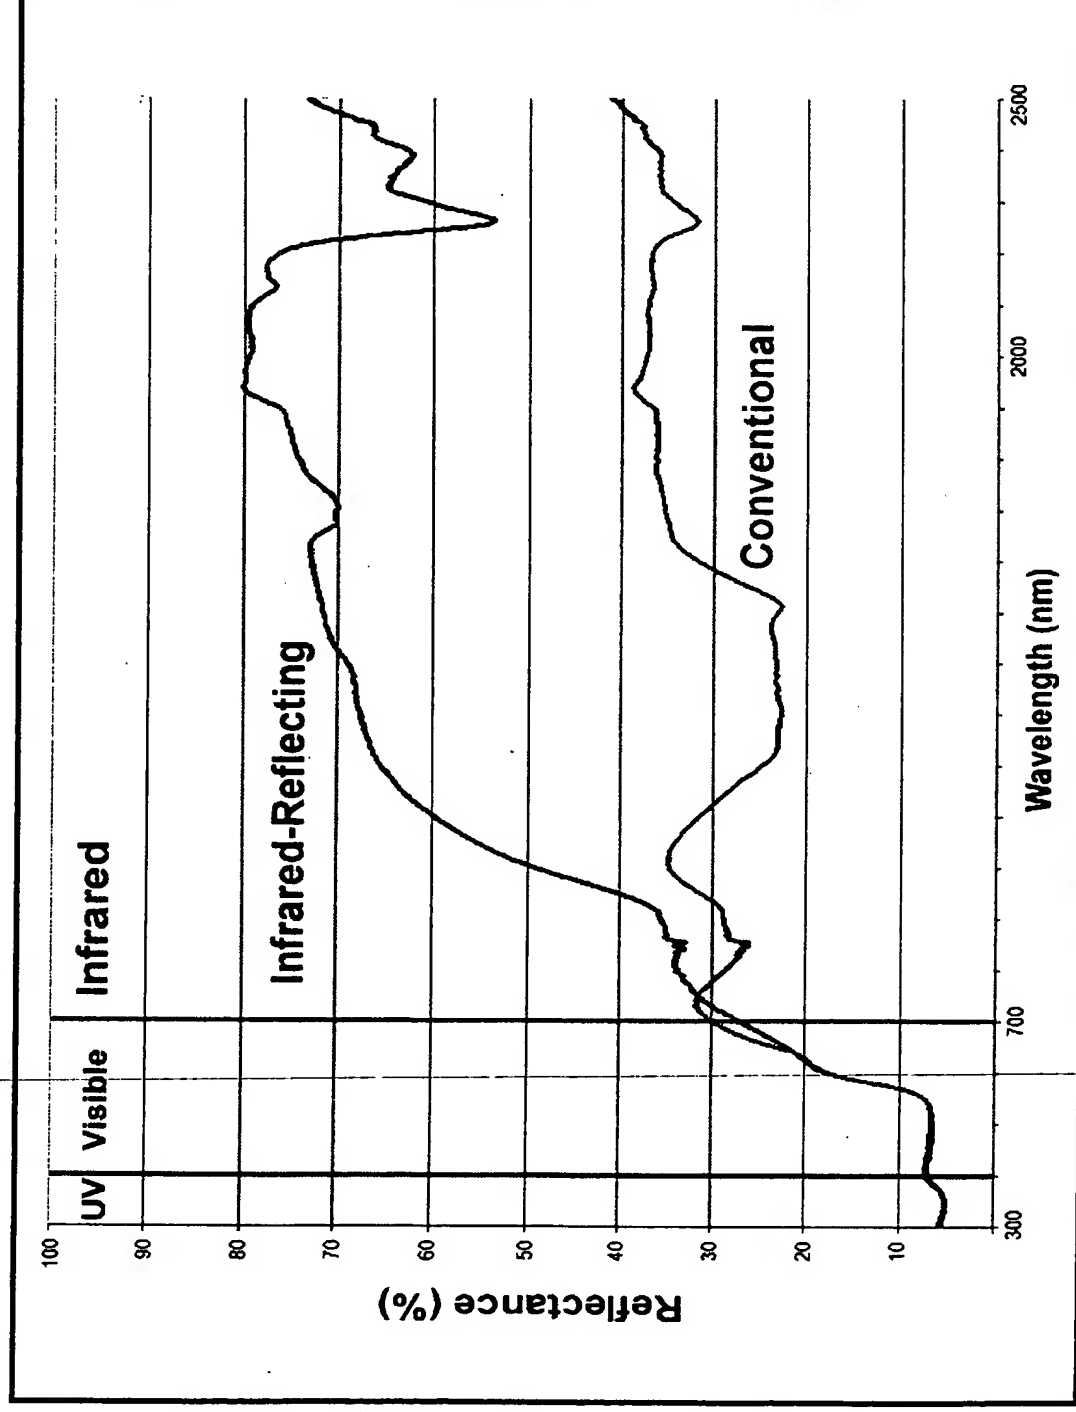

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# Solar Energy Spectrum

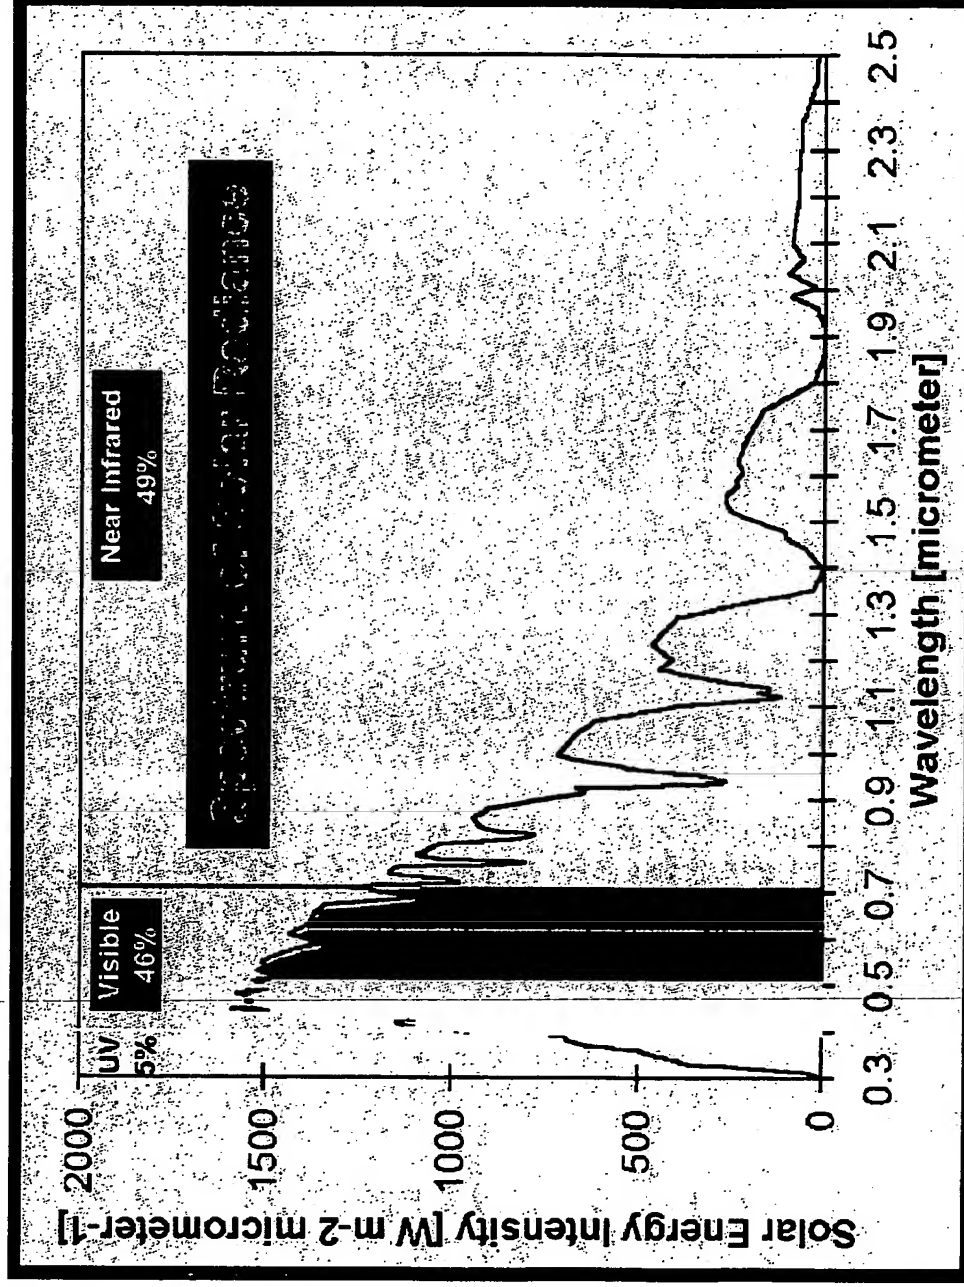

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY





# **Overview: Scope of Work**


- Compare thermal performance of walls with cool (high infrared reflectance) and standard colors
- Use Textured Coatings of America's SuperCote Platinum and SuperCote products

# **Overview: Scope of Work**

- **Phoenix site: Stucco-coated with various constructions facing east, south, southeast and southwest already covered with Mountain Gray color. Install instrumentation and recoat test areas.**
- **Jacksonville site: Wood siding facing south already covered with Underseas color. Install instrumentation and recoat test areas.**
- **Oak Ridge campus site: Bare stucco-coated test area facing south. Add instrumentation; prime and coat test areas.**

# Phoenix Site


- Single-story wings with central vaulted ceiling area for family room + dining room/kitchen

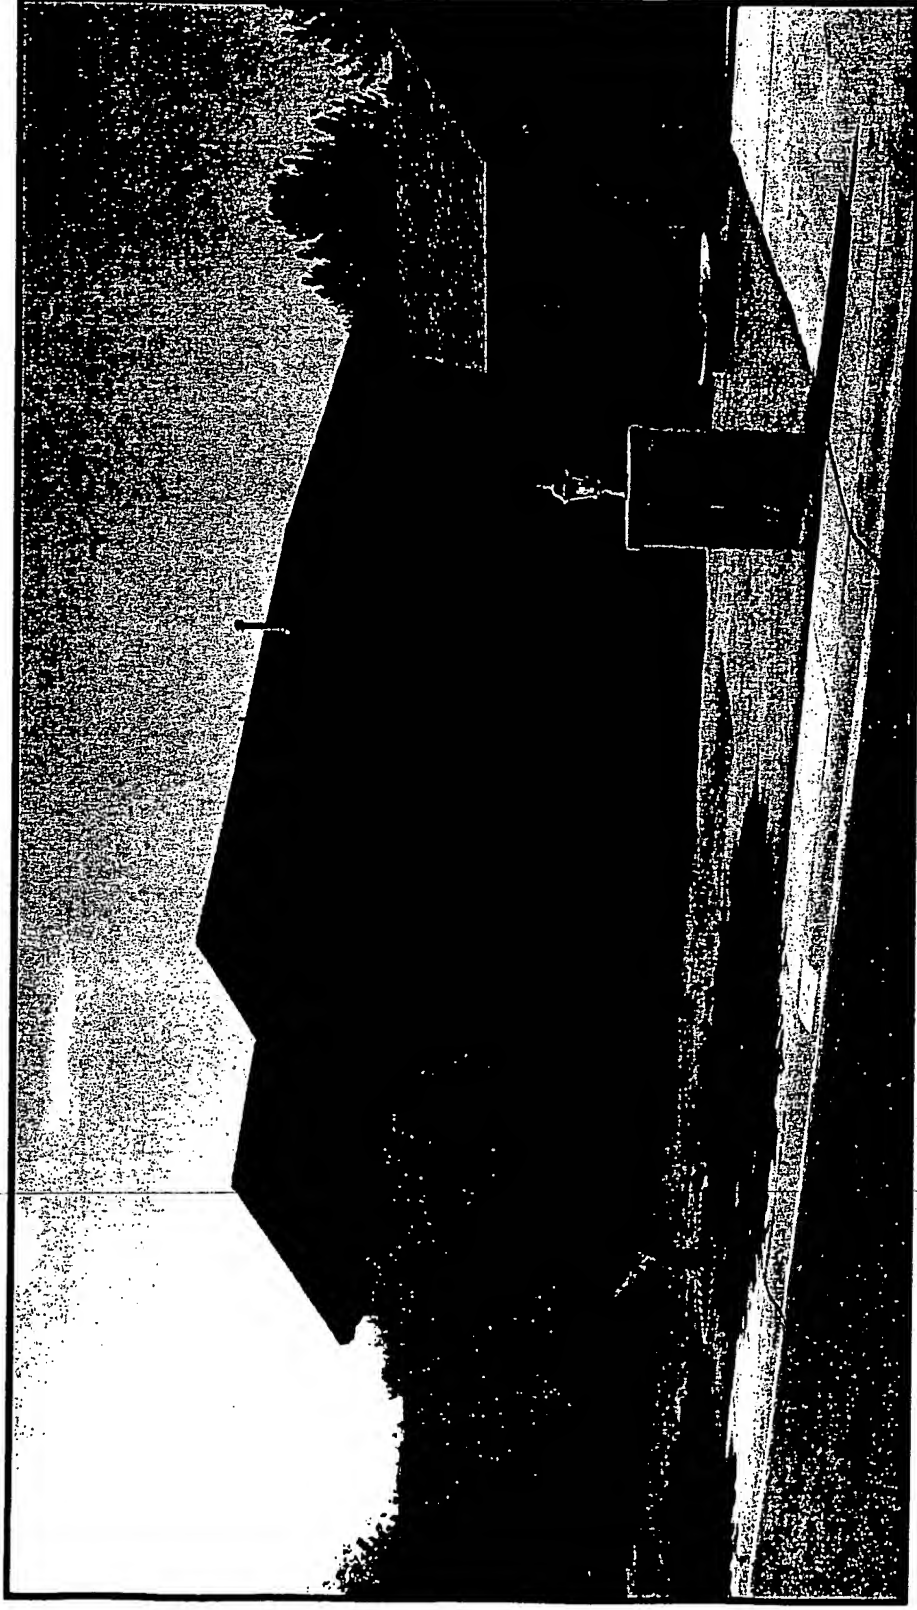

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Phoenix Site

- Southeast and southwest exposures on walls of office in west wing. Outside temperature sensors attached to 10<sup>3</sup>/<sub>4</sub> in. thick walls

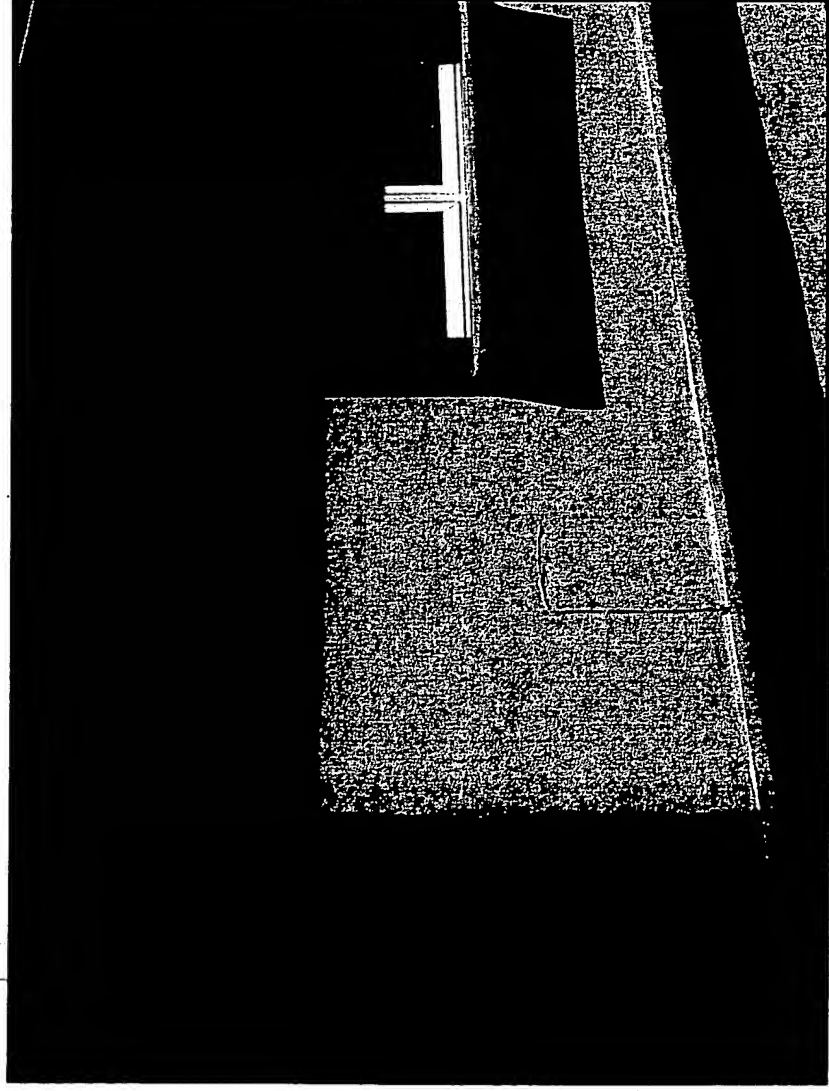


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# Phoenix Site


- Add gypsum panels for instruments to sense inside temperatures and heat flow through walls

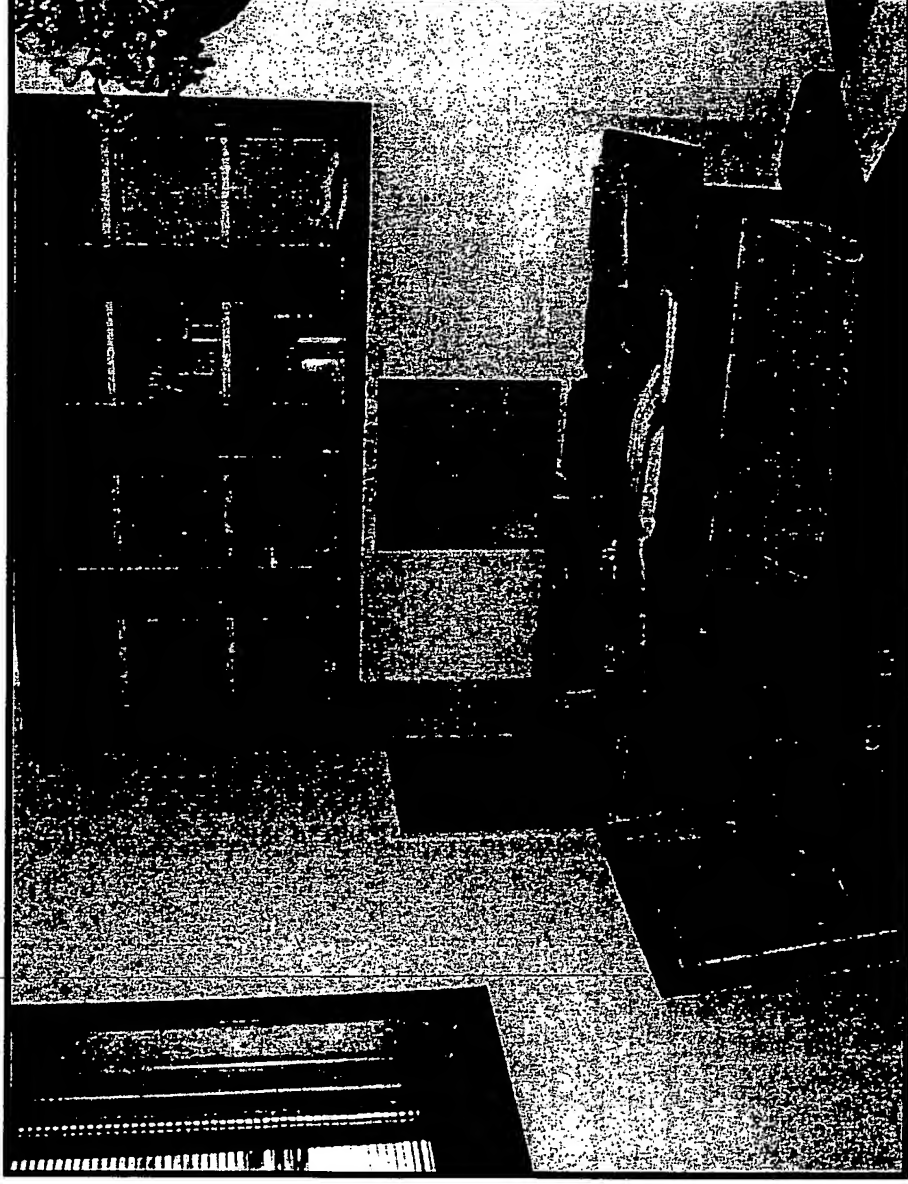

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Phoenix Site


- South and east exposures on walls of exercise room. South 15 in. thick; east 6 $\frac{1}{4}$  in. thick

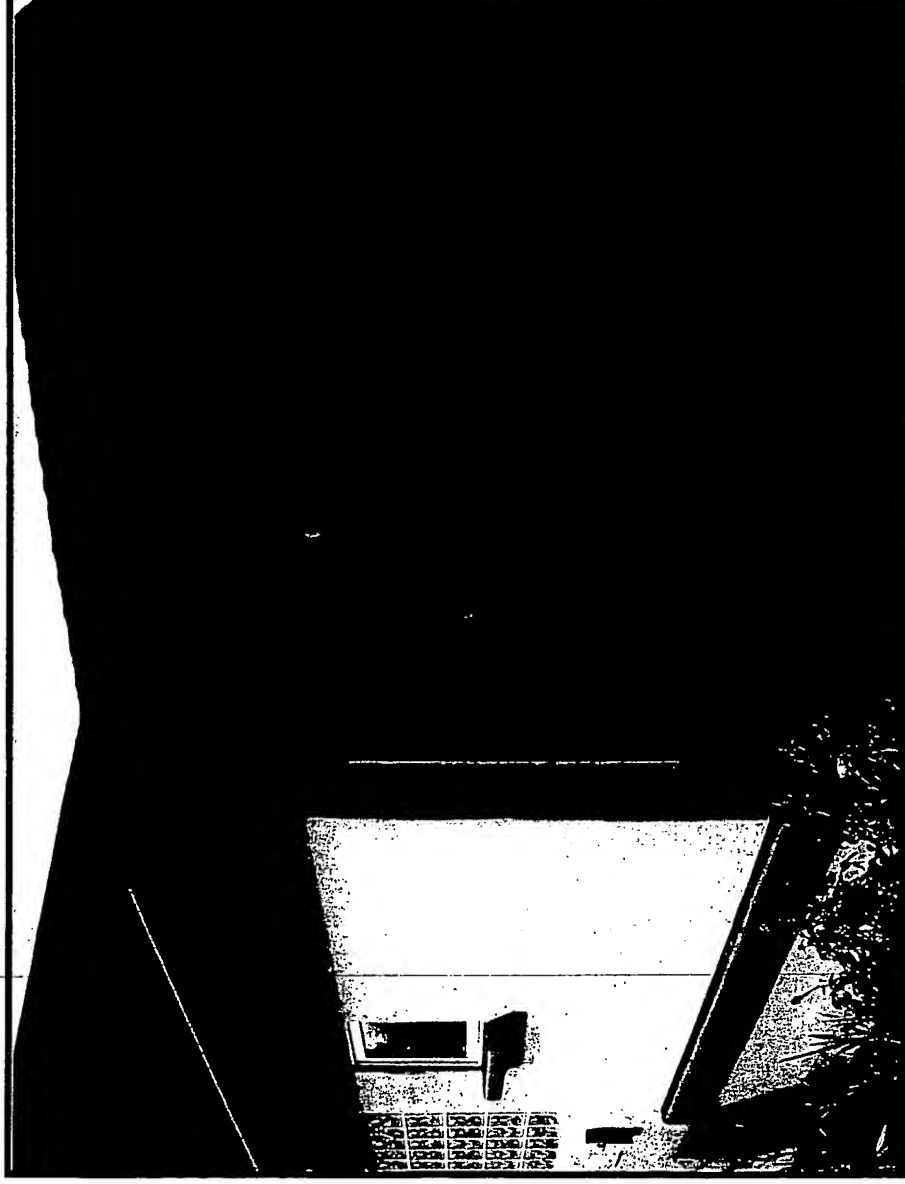

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Phoenix Site


- Data logger and modem in exercise room. Wires from west wing in shallow trench through yard

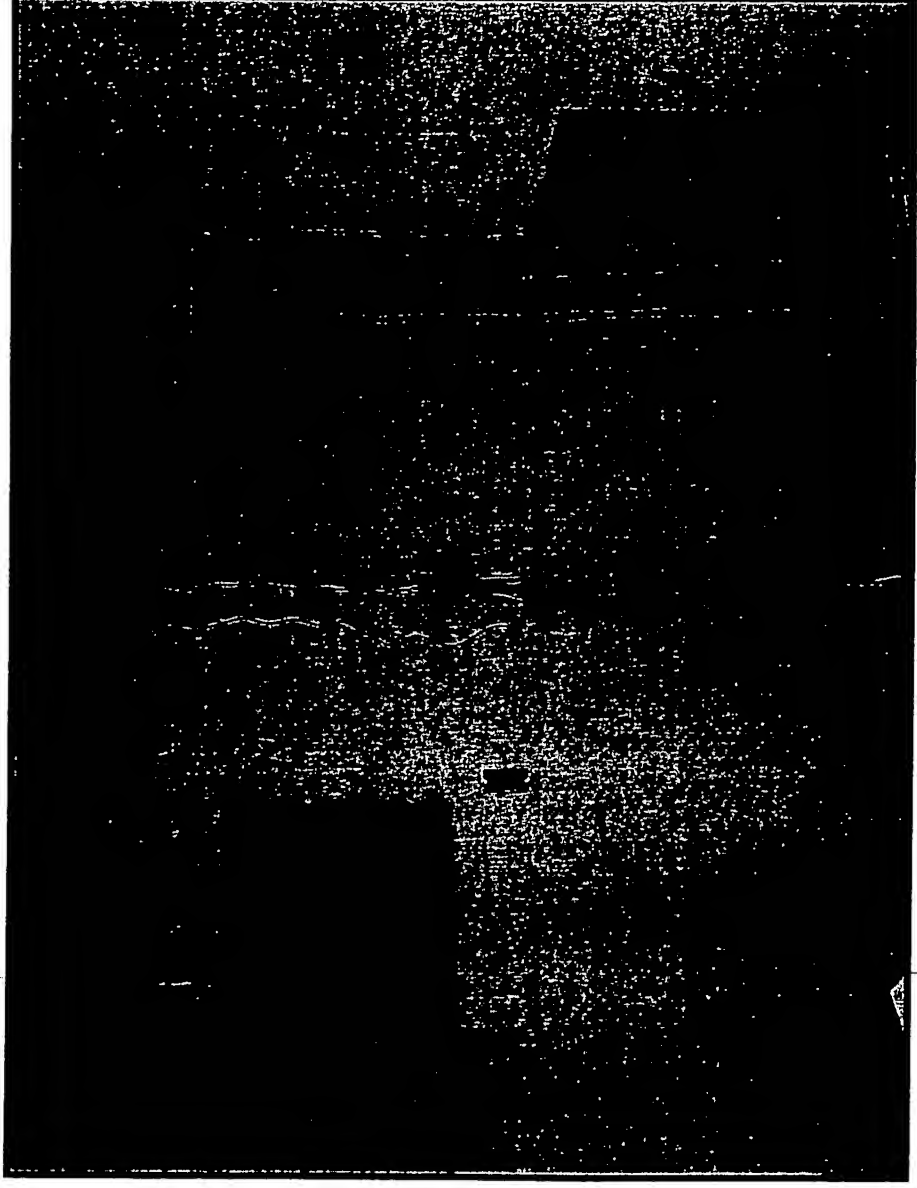

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Phoenix Site

- Data logger transmits data through modem to computer at Oak Ridge over dedicated line

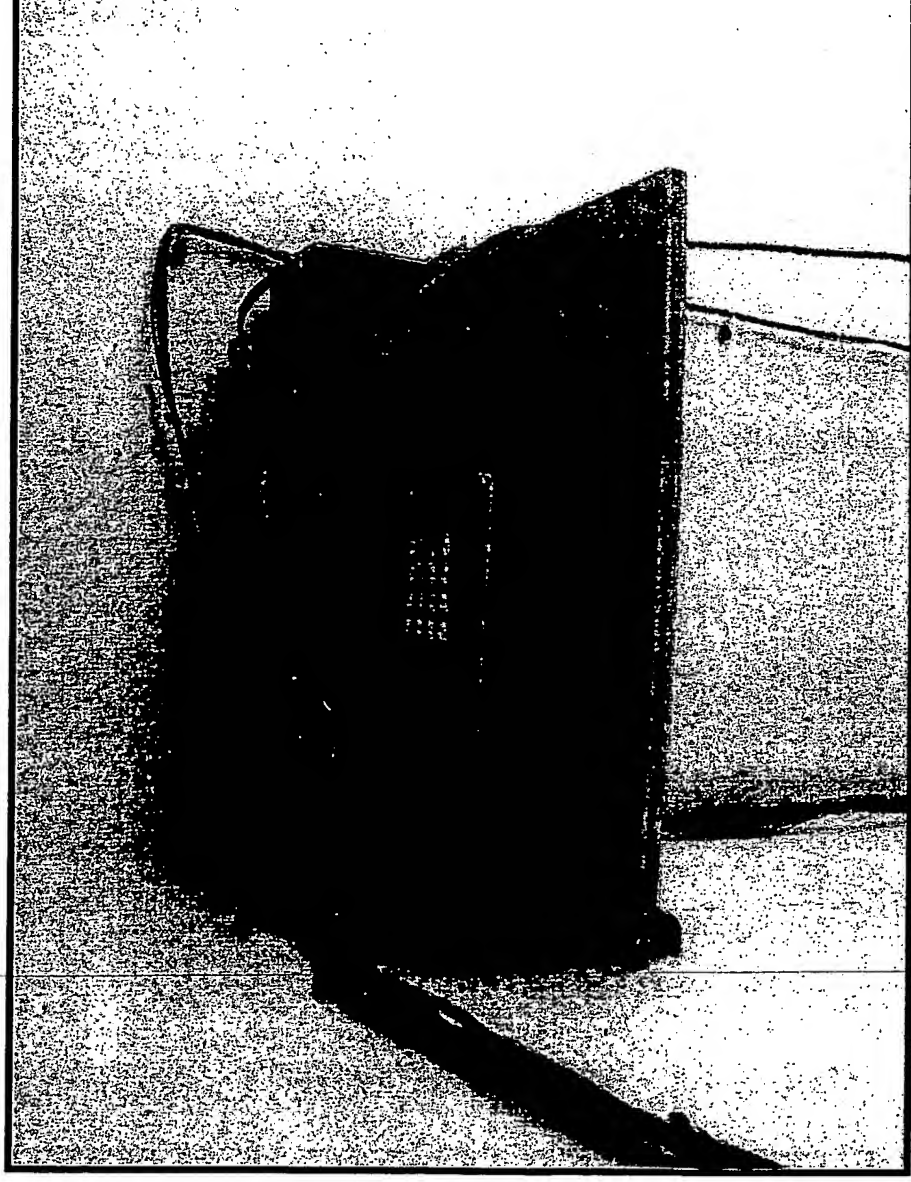


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# Phoenix Site

- Data obtained 5/2/04 through 11/30/04. Remove instrumentation on 12/2/04.
- Check consistency of data with program that estimates wall properties from measured temperatures and heat fluxes. R-values vary as expected.
- Different directions of exposure and varying thickness make it tough to interpret data.
- Limited height of walls and decorative overhang cause shadowing problems.

# Phoenix Site: IR East vs IR Southwest

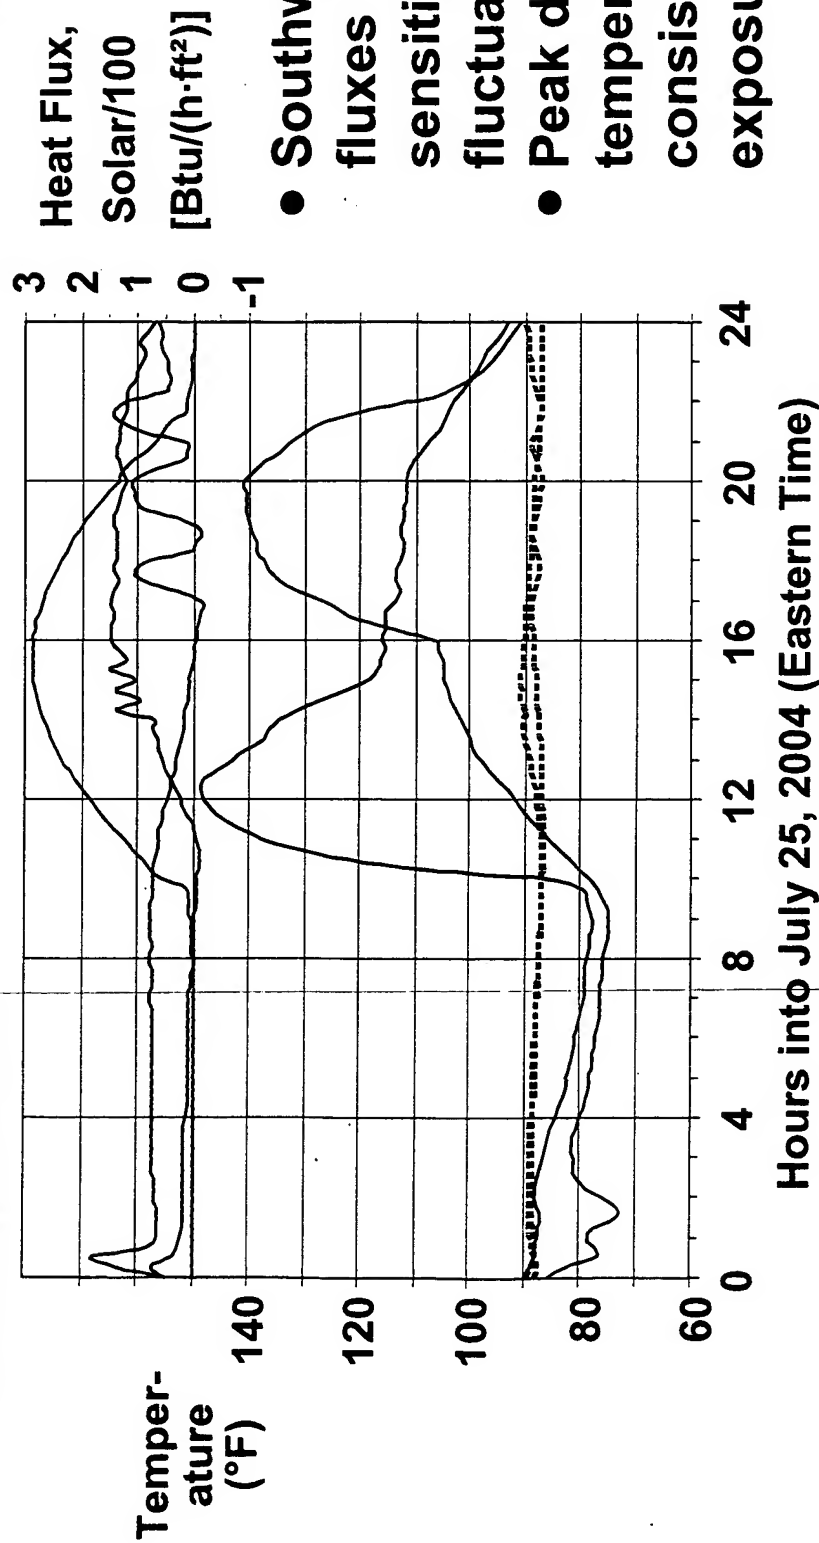


- Southwest heat fluxes (in office) sensitive to A/C fluctuations
- Peak daytime temperatures are consistent with exposure

# Phoenix Site: Non Southeast vs IR South

— Air Temperature  
 — Non Southeast Outside  
 ..... Non Southeast Inside  
 — IR South Outside  
 ..... IR South Inside


— Horiz. Solar  
 — Non Southeast Heat Flux  
 — IR South Heat Flux

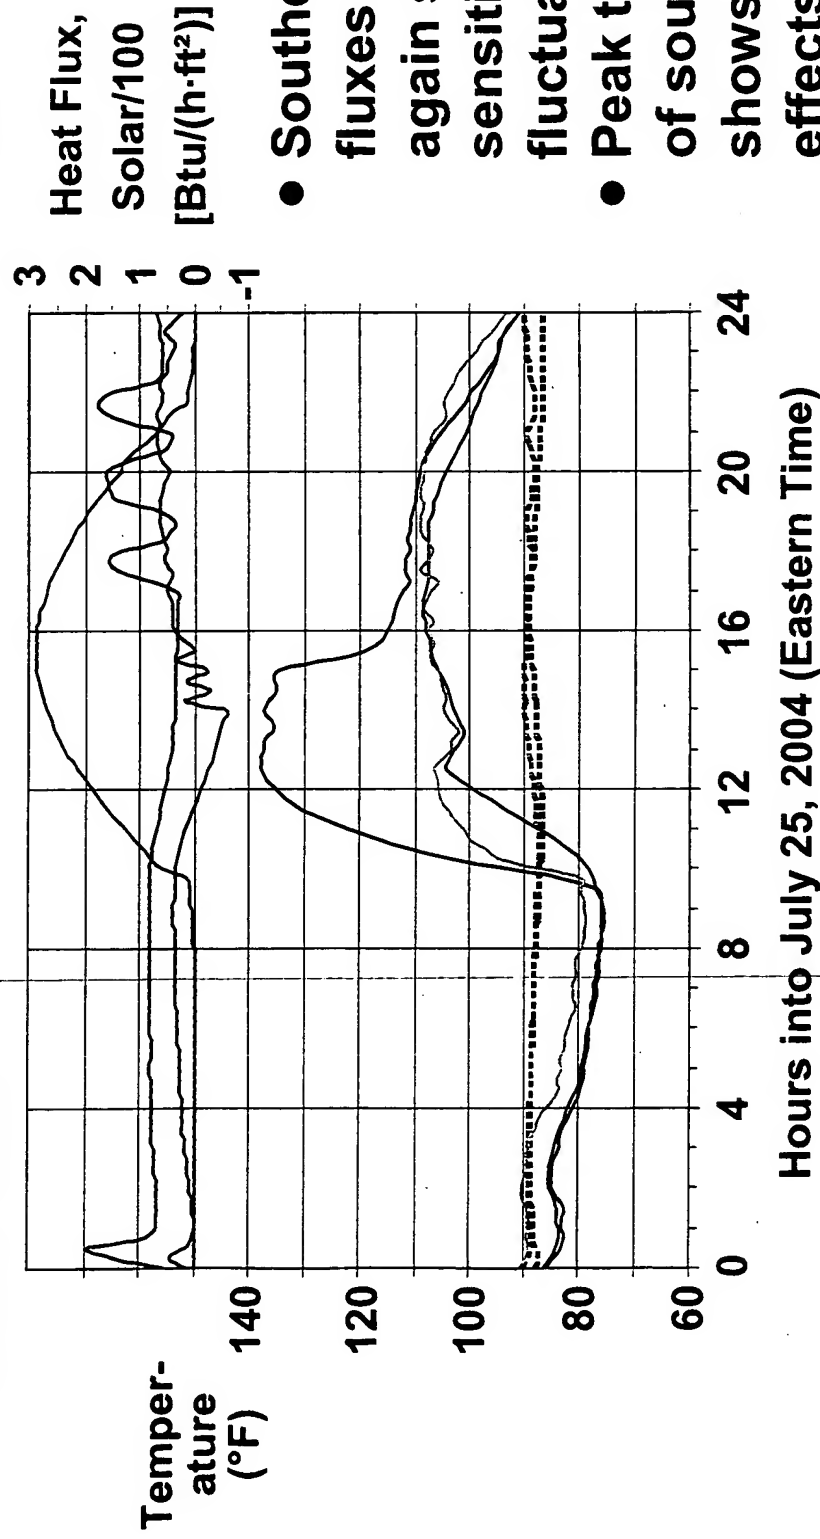

- Southeast heat fluxes (in office) again show sensitivity to A/C fluctuations
- Peak temperature of south exposure shows shadowing effects

# **Jacksonville Site**


- Two-story house on Ponte Vedra beach

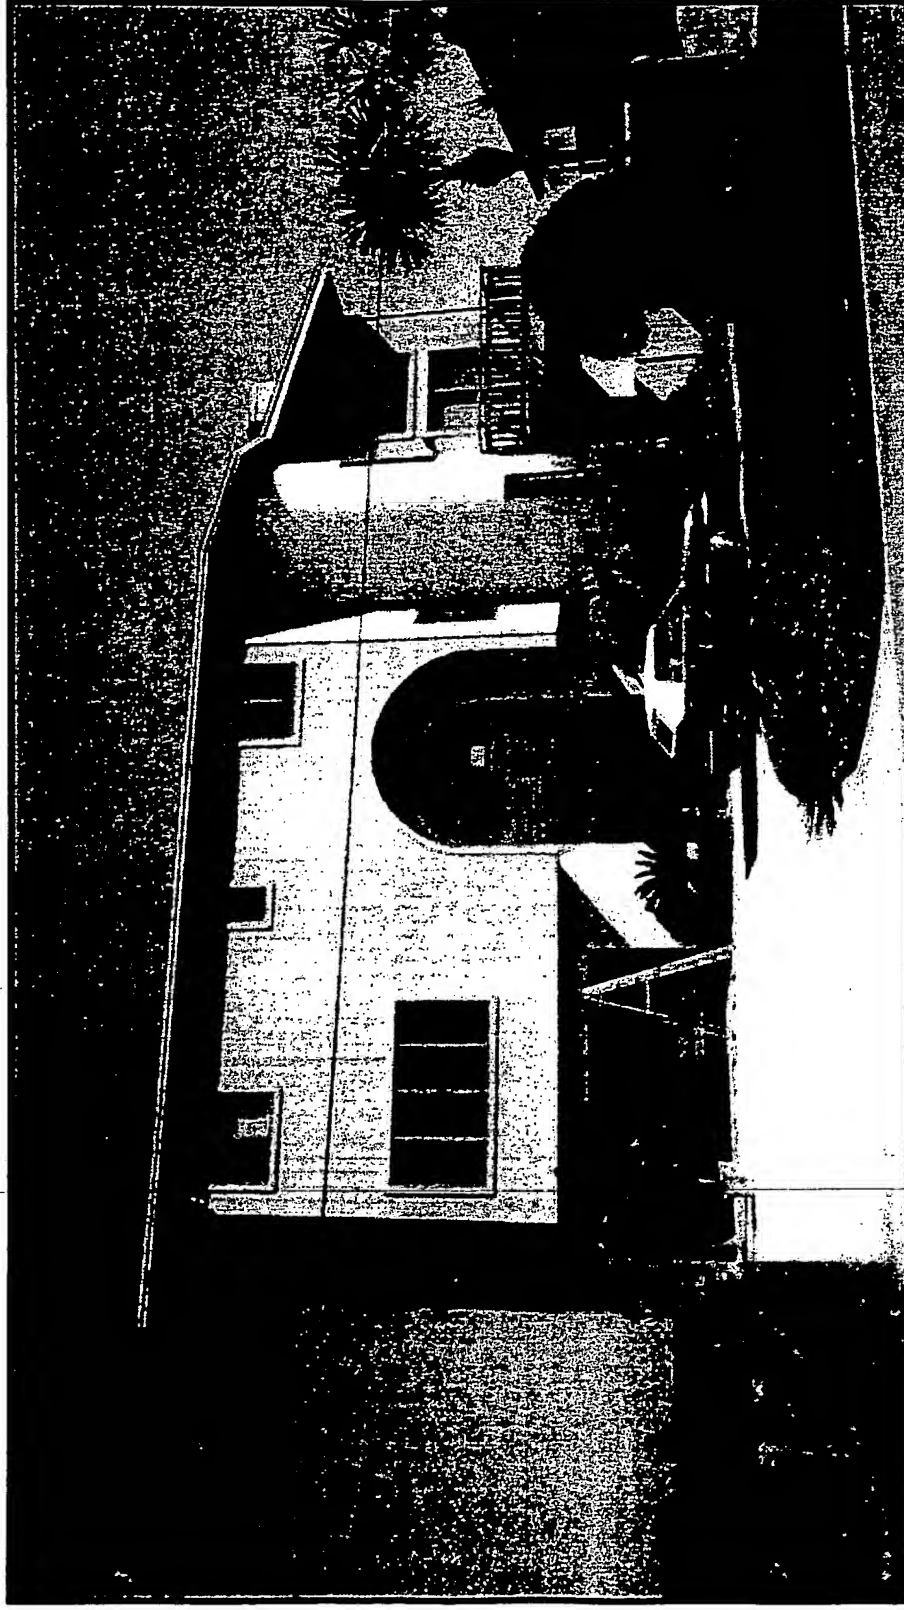

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Jacksonville Site

- South-facing test exposures outside family room above steps from deck that faces ocean

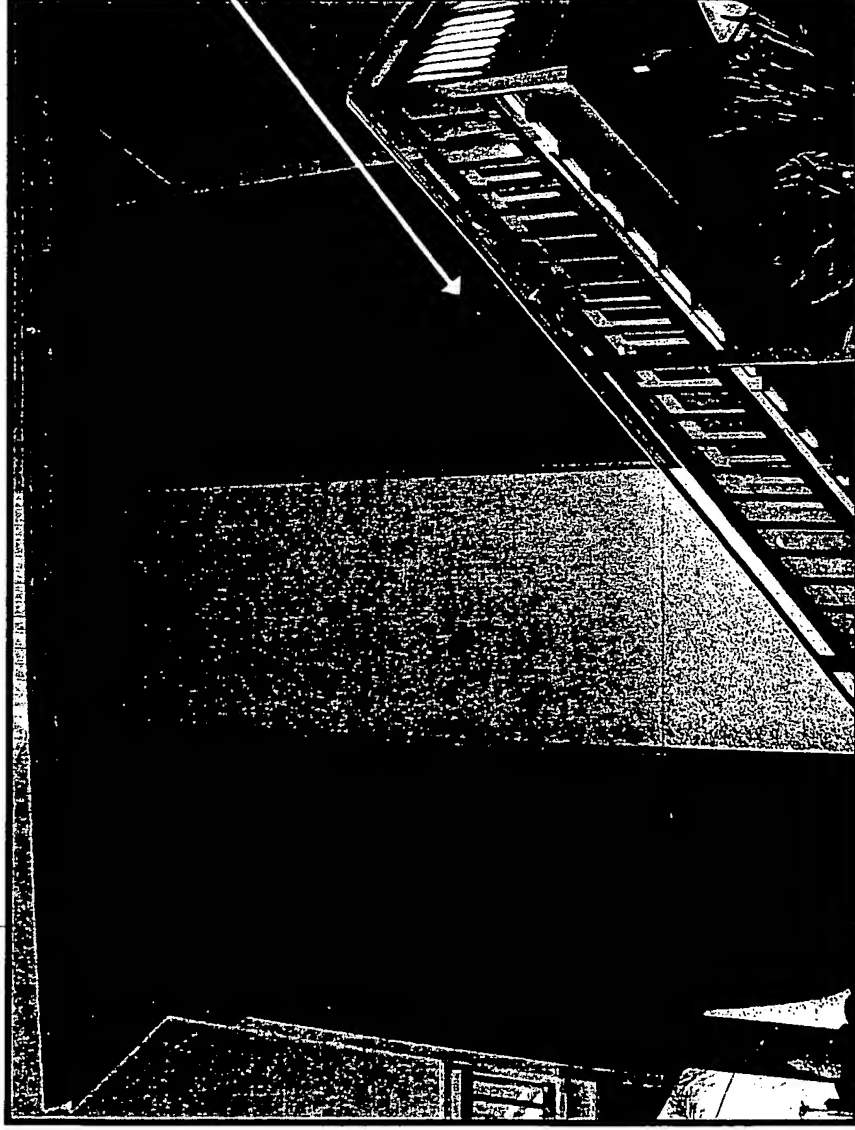


Meter  
for wall  
solar  
between  
test  
areas

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# Jacksonville Site


- Gypsum panels on inside walls painted to match existing decor

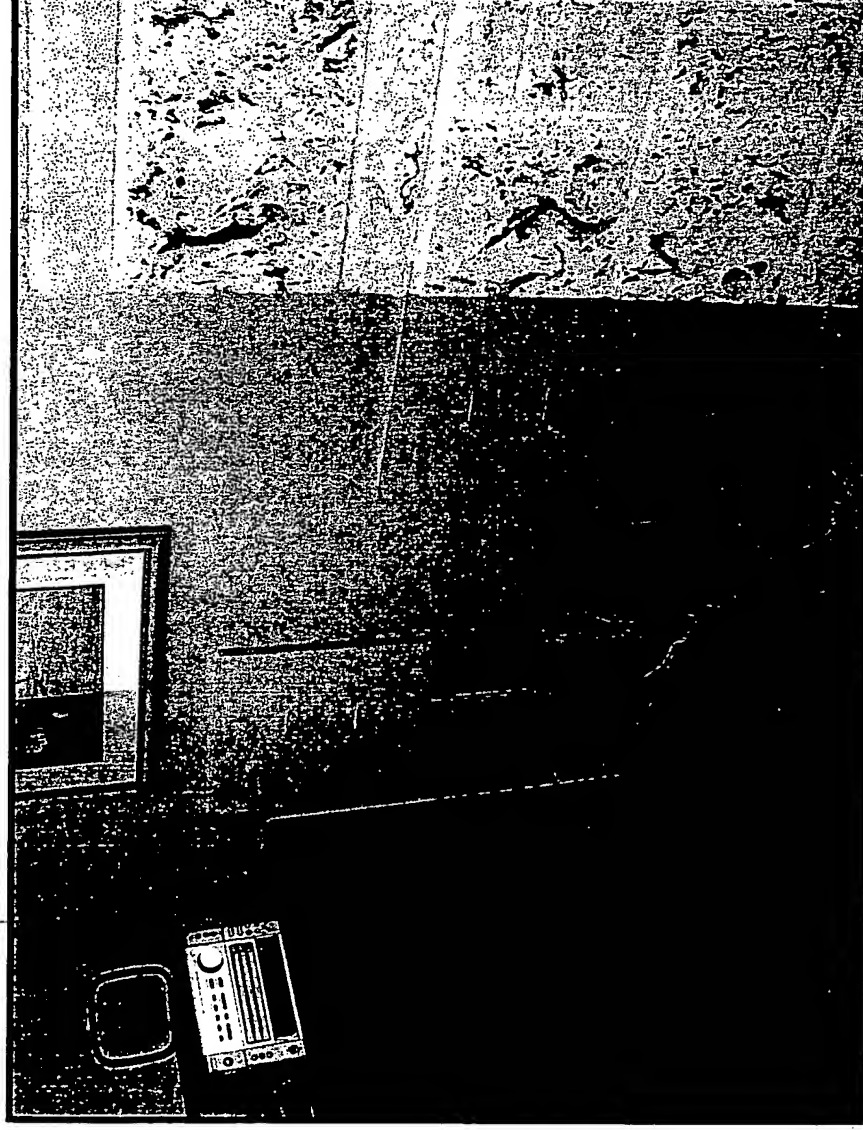

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# Jacksonville Site

- Data logger and modem tucked into corner behind TV. Used house phone line for monthly download. Owner plugged in phone line for call

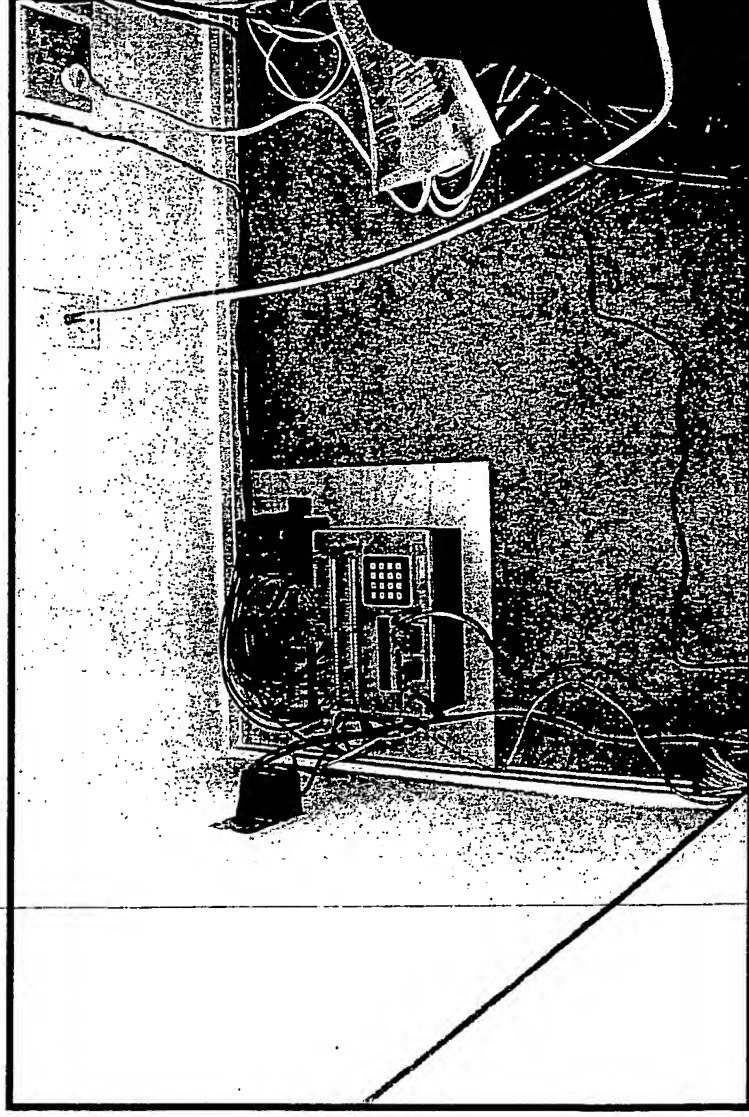

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

# **Jacksonville Site**


- **Data obtained 5/5/04 through 12/3/04 with recoating on 7/9/04. Remove instrumentation on 12/8/04**
- **Behaviors of solar flux incident on wall and outside surface temperatures show more cloudiness and rain than in Phoenix. Saw effects of Hurricanes Frances and Jeanne**
- **Exposures not at same level (followed slope of steps) so some height effects both outside and inside**
- **Railing for steps and enclosure for fireplace flue cause shadowing.**



# Jacksonville Site: Non Lower vs IR Upper

— Non Outside  
 ..... Non Inside  
 — IR Outside  
 ..... IR Inside


— Wall Solar  
 — Non Heat Flux  
 — IR Heat Flux

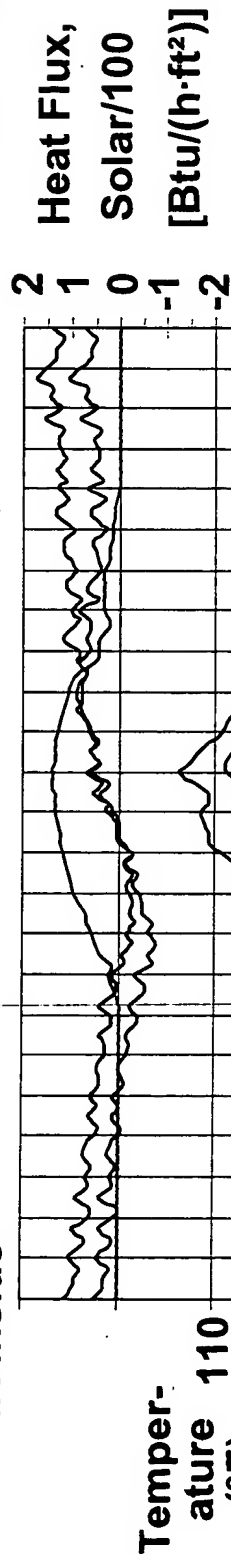

- Outside wall temperatures equal at night
- Small peak temperature differences: coatings over existing coating

# ORNL Site

- Stucco test section on south wall of Envelope Systems Research Apparatus (ESRA)

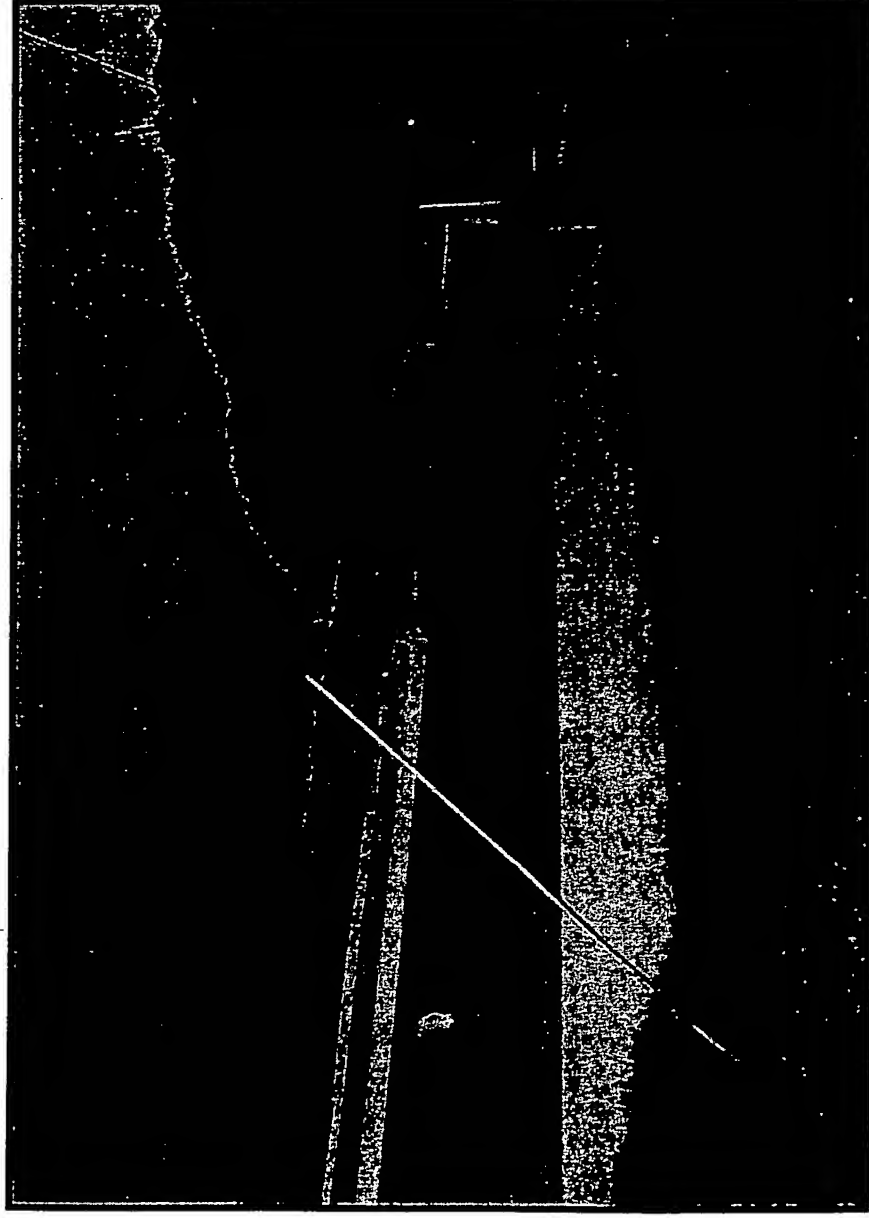


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# ORNL Site

- Underseas Supercote Platinum (IR) on right stud space and upper half of middle; Supercote (Non) on rest except for strip of uncoated primer at bottom

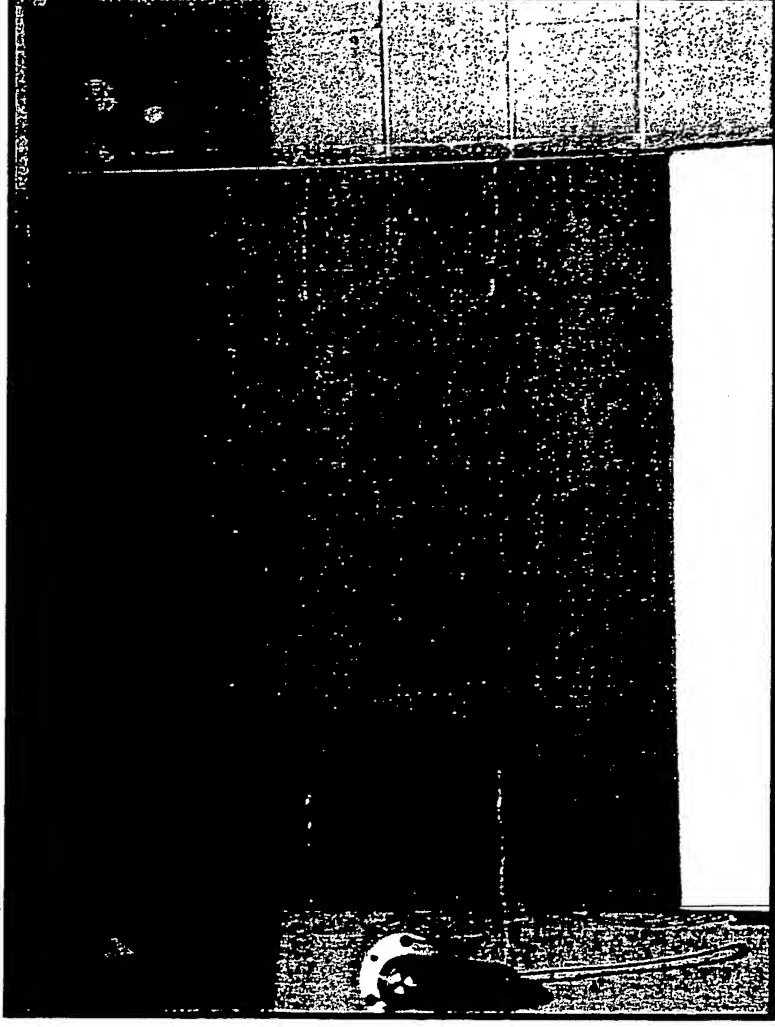


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# ORNL Site

- Add gypsum panels on inside like at Phoenix and Jacksonville sites

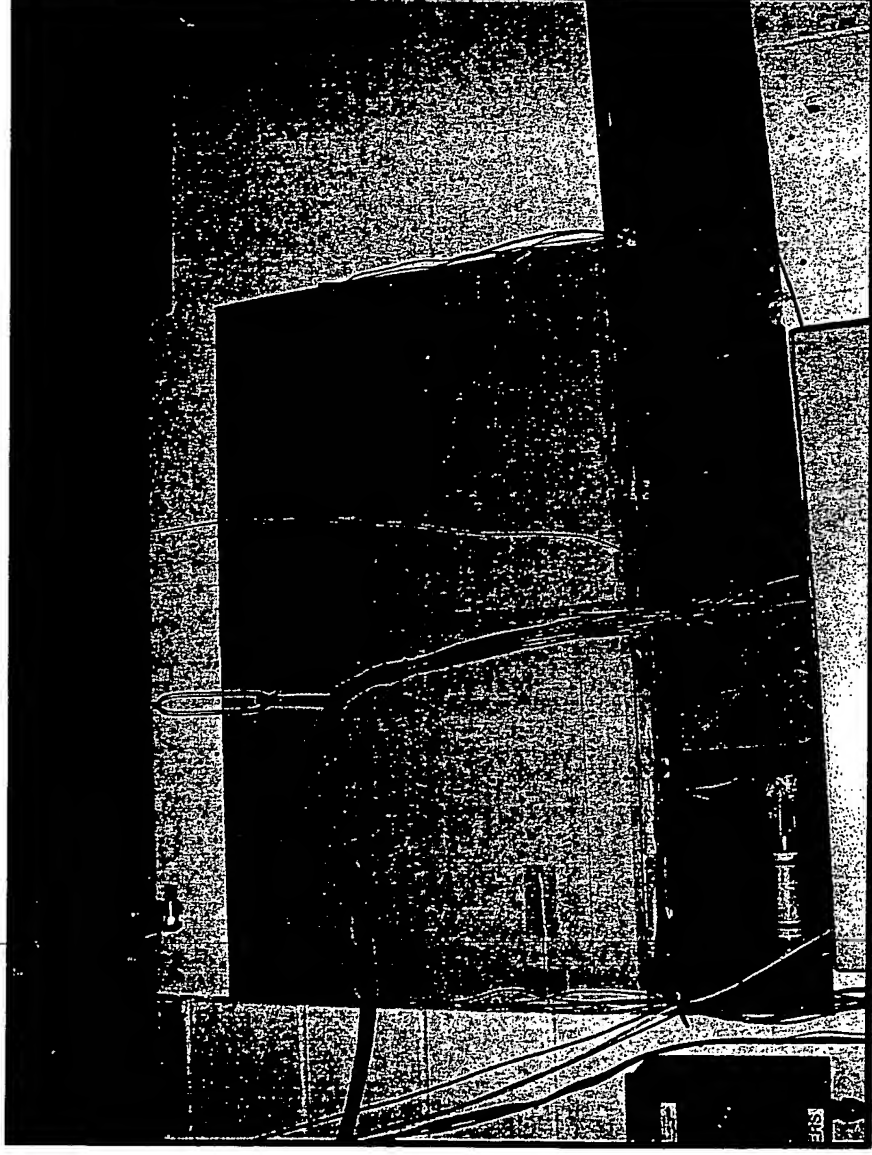


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

- **Have ESRA data acquisition system in place and complete weather station next door**



# ORNL Site

- Computer dedicated to ESRA data acquisition records detailed thermal performance

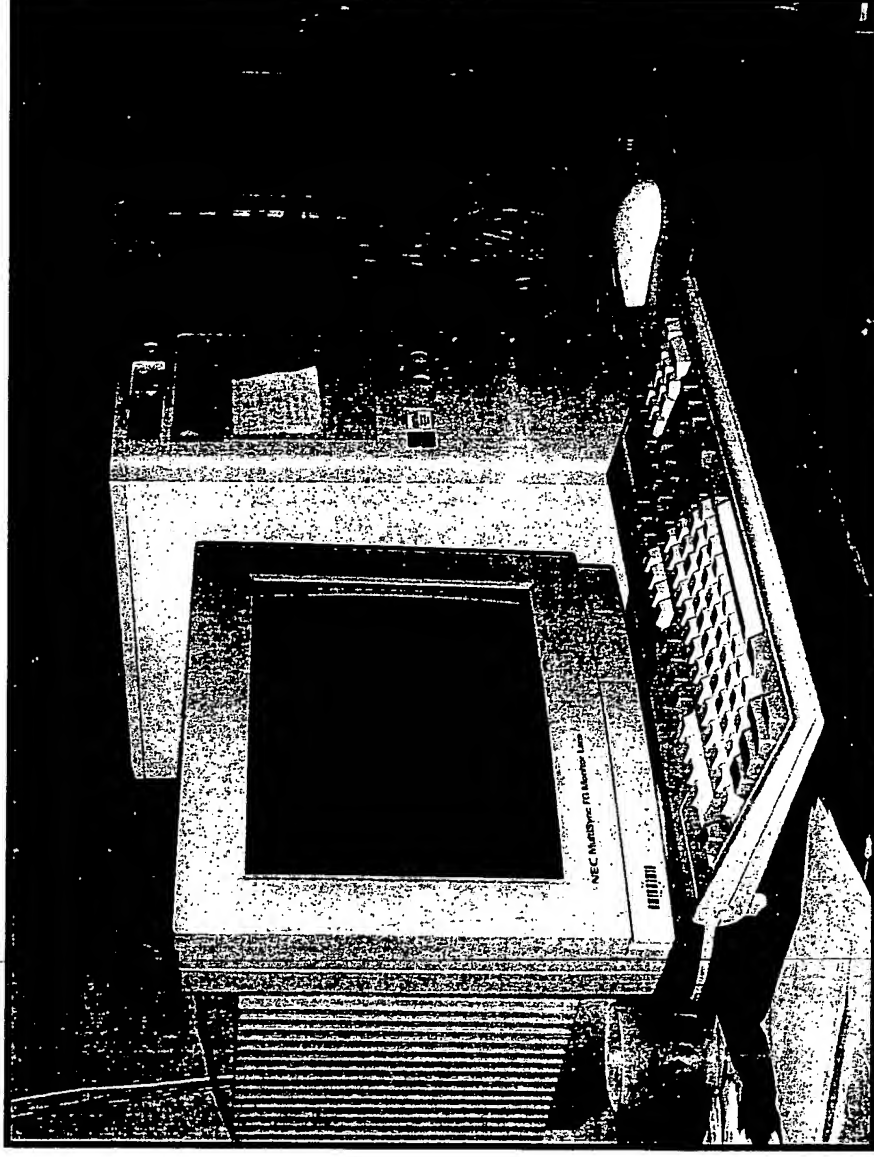

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY


# **ORNL Site**

- **Data starting 7/30/04 with coating on 8/3/04.  
Data acquisition through August 2005**
- **Check consistency of data with program to estimate wall properties from temperature and heat flux measurements. Data very consistent from month to month**
- **Behavior of solar radiation control on vertical walls more complicated than low-slope roofs.  
Difficult to generalize simply**

# ORNL Site: Non vs IR -- Spring Day

— Non Outside  
 ..... Non Inside  
 — IR Outside  
 ..... IR Inside  
 — Air

— Wall Solar  
 — Non Heat Flux  
 — IR Heat Flux

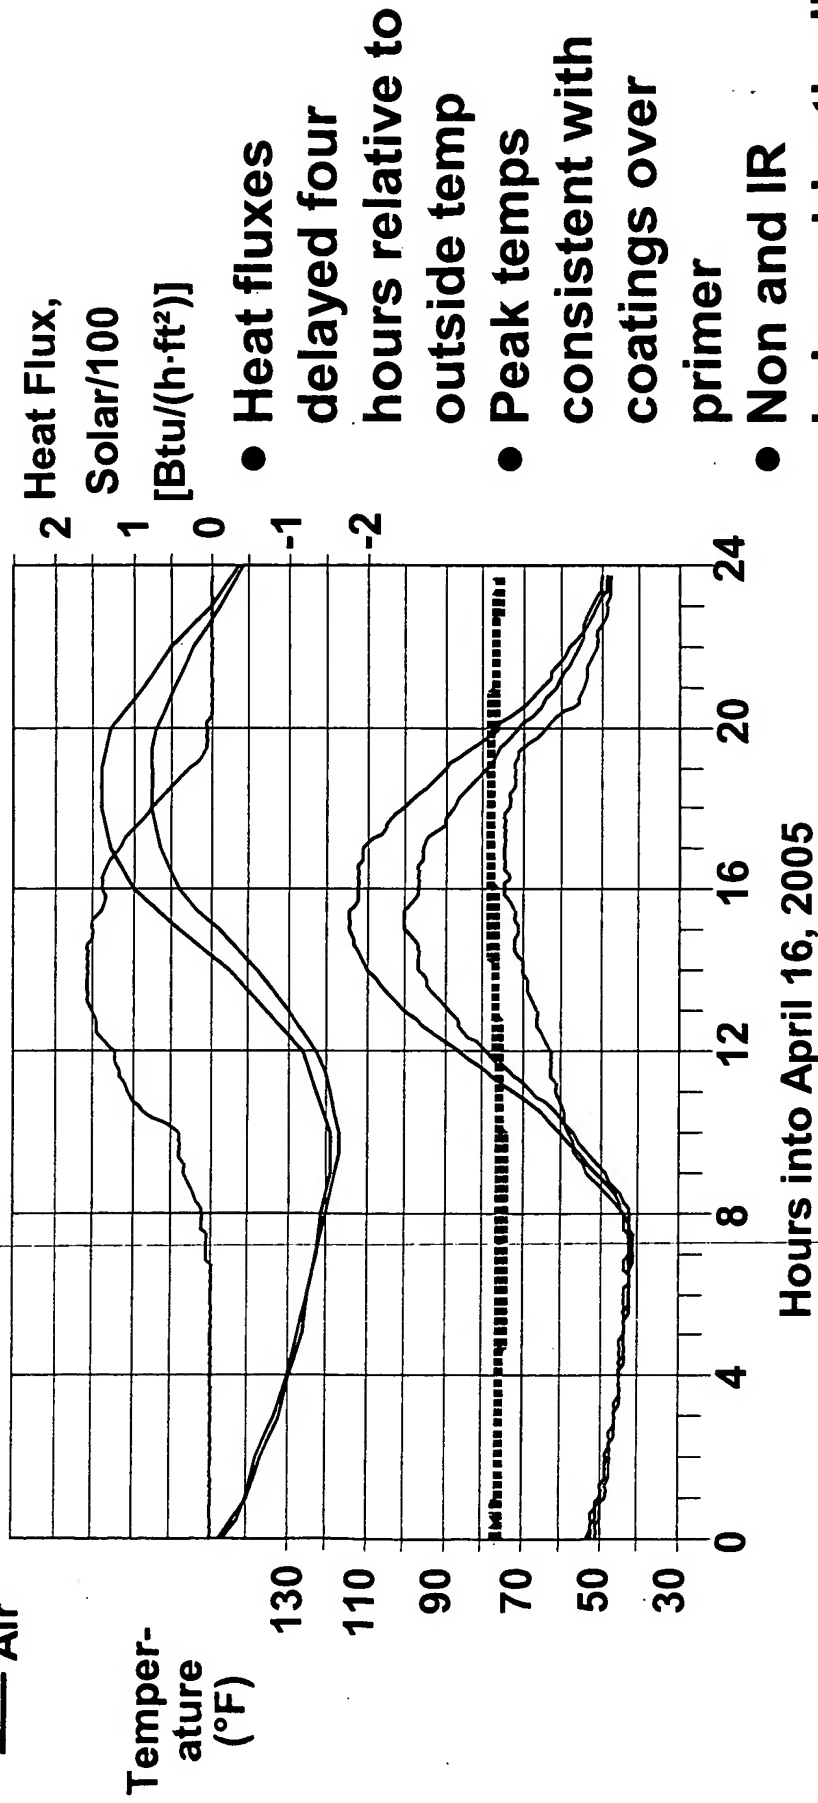


- Heat fluxes delayed four hours relative to outside temp
- Peak temps consistent with coatings over primer
- Non and IR behave identically at night



# ORNL Site: Non vs IR -- Summer Day

— Non Outside  
 ..... Non Inside  
 — IR Outside  
 ..... IR Inside  
 — Air


— Wall Solar  
 — Non Heat Flux  
 — IR Heat Flux

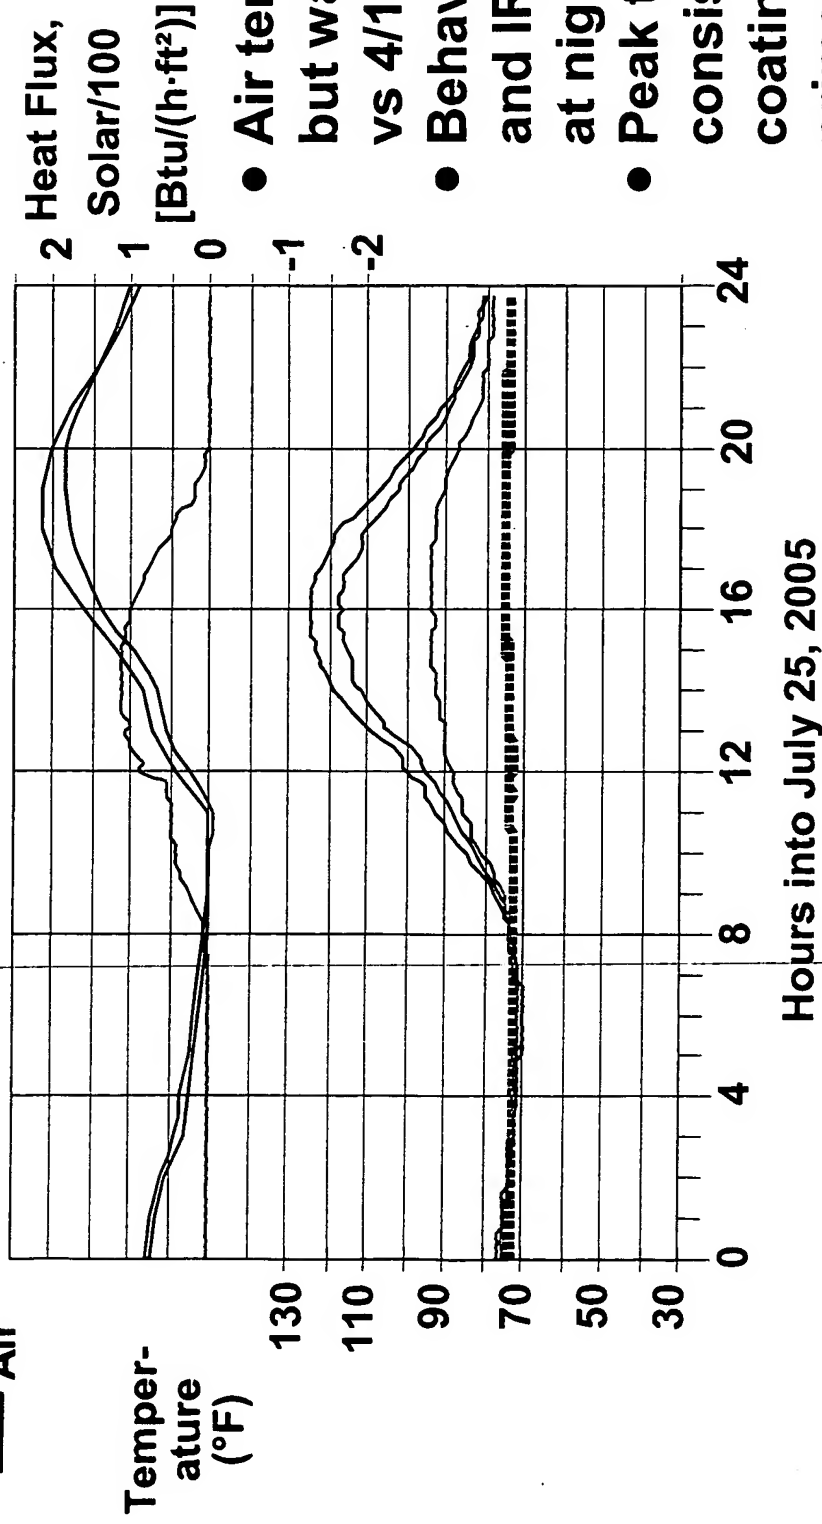

- Air temp warmer but wall solar lower vs 4/16/05
- Behavior of Non and IR again same at night
- Peak temps again consistent with coatings over primer

# Model for Wall Behavior

- Seek a model that can be generalized to give results for whole buildings
- Have done extensive validation of a model in DOE 2.2 for a 1100 ft<sup>2</sup> ranch house

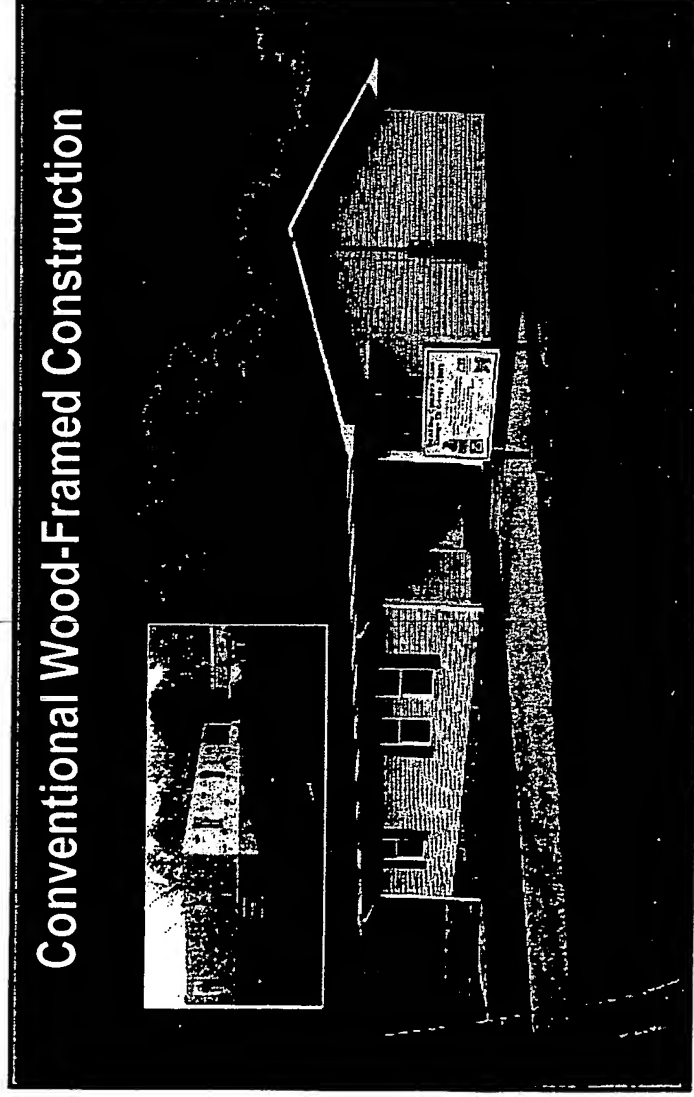


- Heat/cool with heat pump: 68°F winter; 76°F summer; size heat pump for climate
- Occupy with 3 people + Building America energy use profiles

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY



# Model for Wall Behavior

- To validate model, generate climatic data from ORNL weather station records for year of test
- Use properties of wall materials along with construction details for test section

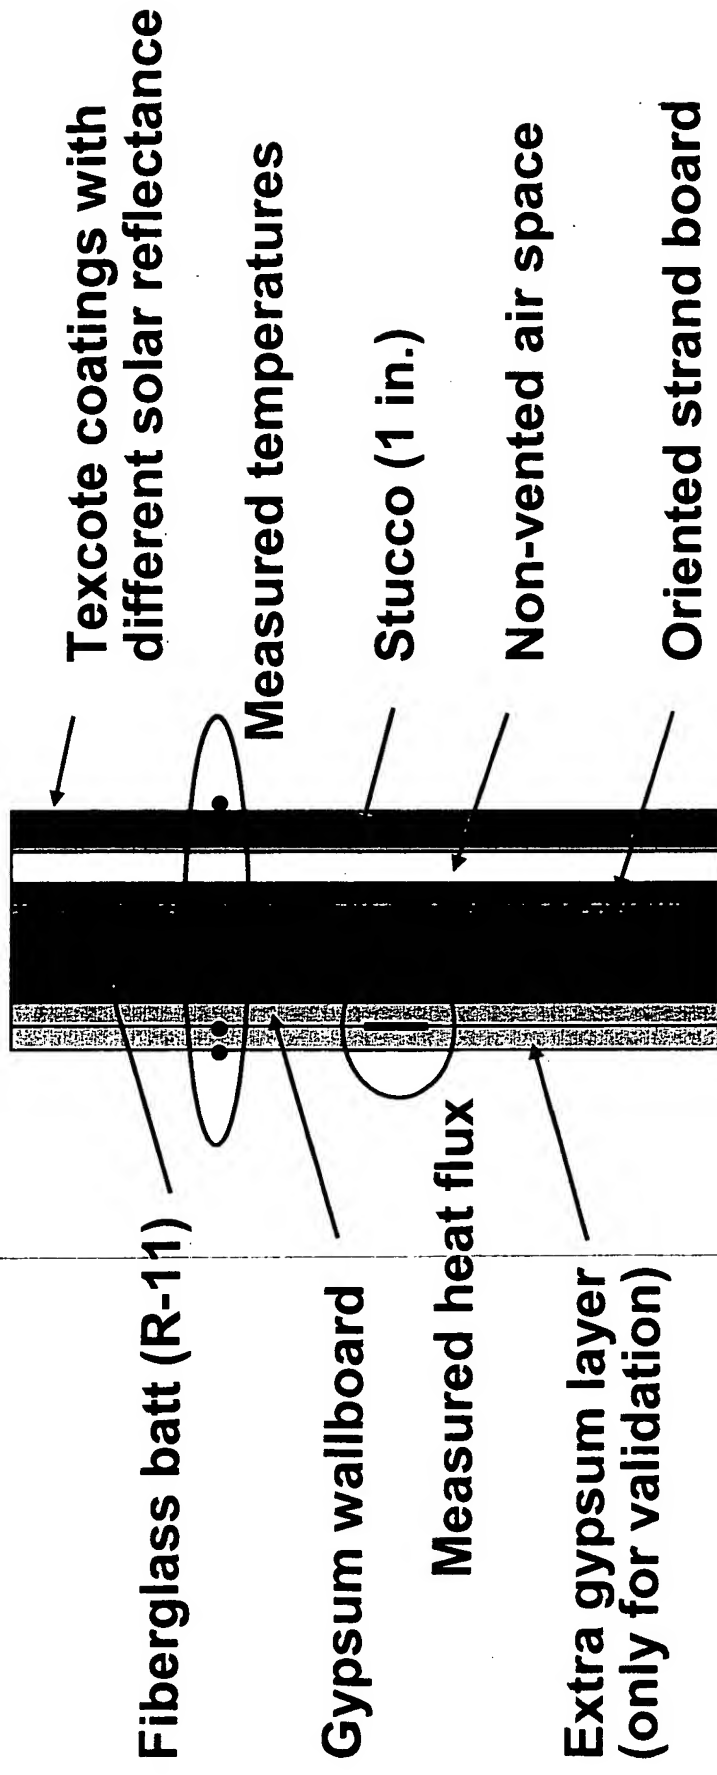

# Solar Reflectance of Coatings

- Samples over primer: Mountain Gray (Phoenix) and Underseas (Jacksonville and ORNL) 7/2/04

Mountain Gray Supercote Platinum	0.44
Mountain Gray Supercote	0.30
Underseas Supercote Platinum	0.51
Underseas Supercote	0.25

- Jacksonville on wood siding and existing coating 12/8/04

Underseas Supercote Platinum	0.40
Underseas Supercote	0.24

- ORNL on Stucco

Texcote Primer

Underseas Supercote Pt

Underseas Supercote

8/4/04 9/27/04 5/18/05 8/3/05

0.71 0.67 0.72 0.66

0.49 0.50 0.49 0.49

0.24 0.24 0.24 0.24

0.50  
0.24

Use averages

# **Features of DOE 2.2 of interest**

- **Can specify wall and solar reflectance of exterior surface and nearby ground**
- **Sun tracked hour by hour and can shade exterior surfaces by building and landscape**
- **Simulation of annual energy use by heating and cooling system includes response to thermostat schedules and to thermal mass in envelope**


# Model of South Wall vs Measurement: Temperatures at Outside – Spring Day

Measure (solar reflectance):

— IR surface (0.495)  
 — Non surface (0.238)  
 — Air

DOE 2.2 with ground reflectance =

...x... 0.24      ...o... 0.08  
 ...x... 0.24      ...o... 0.08

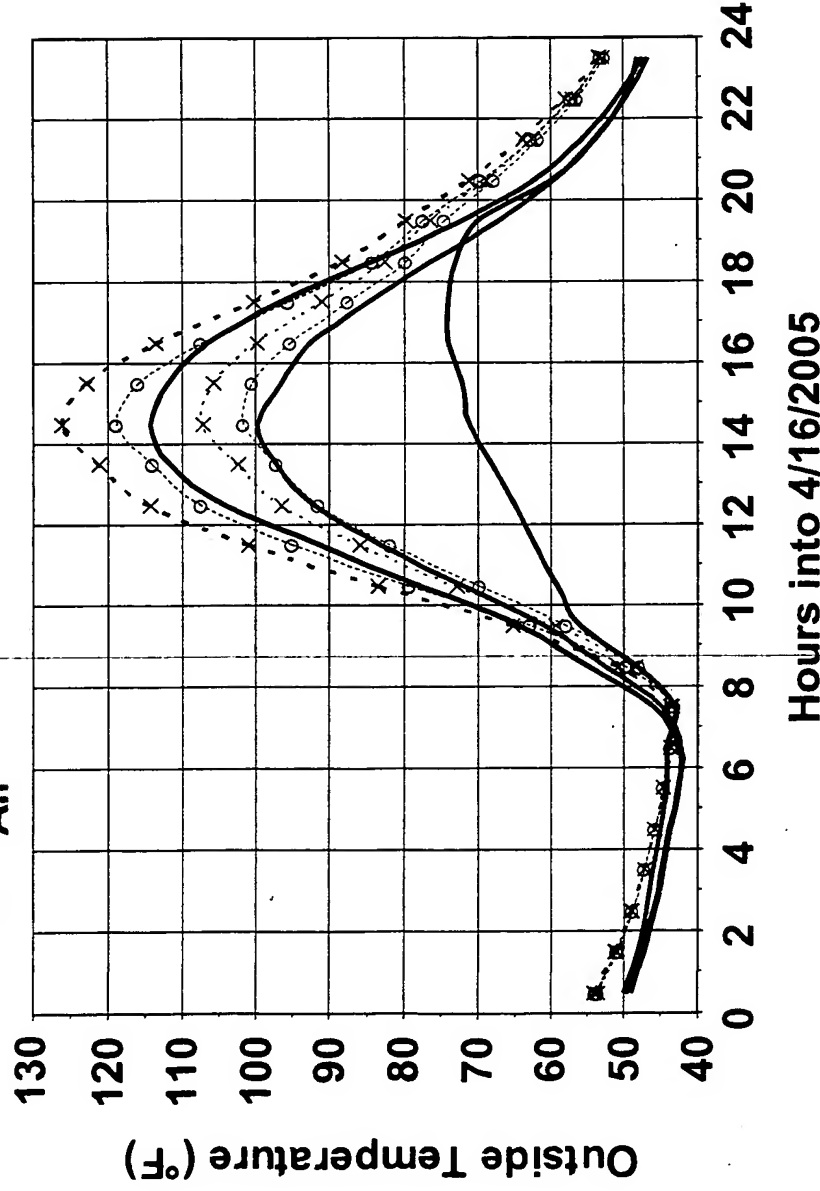

- Surface measurements and DOE 2.2 predictions equal air temperature at night
- DOE 2.2 peak predictions above peak measurements
- Ground reflectance of 8% (dark soil, asphalt) better than 24% (dry grass) for spring day


# Model of South Wall vs Measurement: Temperatures at Outside - Summer Day

Measure (solar reflectance):

— IR surface (0.495)  
 — Non surface (0.238)  
 — Air

DOE 2.2 with ground reflectance =


...x... 0.24      ...o... 0.08  
 ...x... 0.24      ...o... 0.08

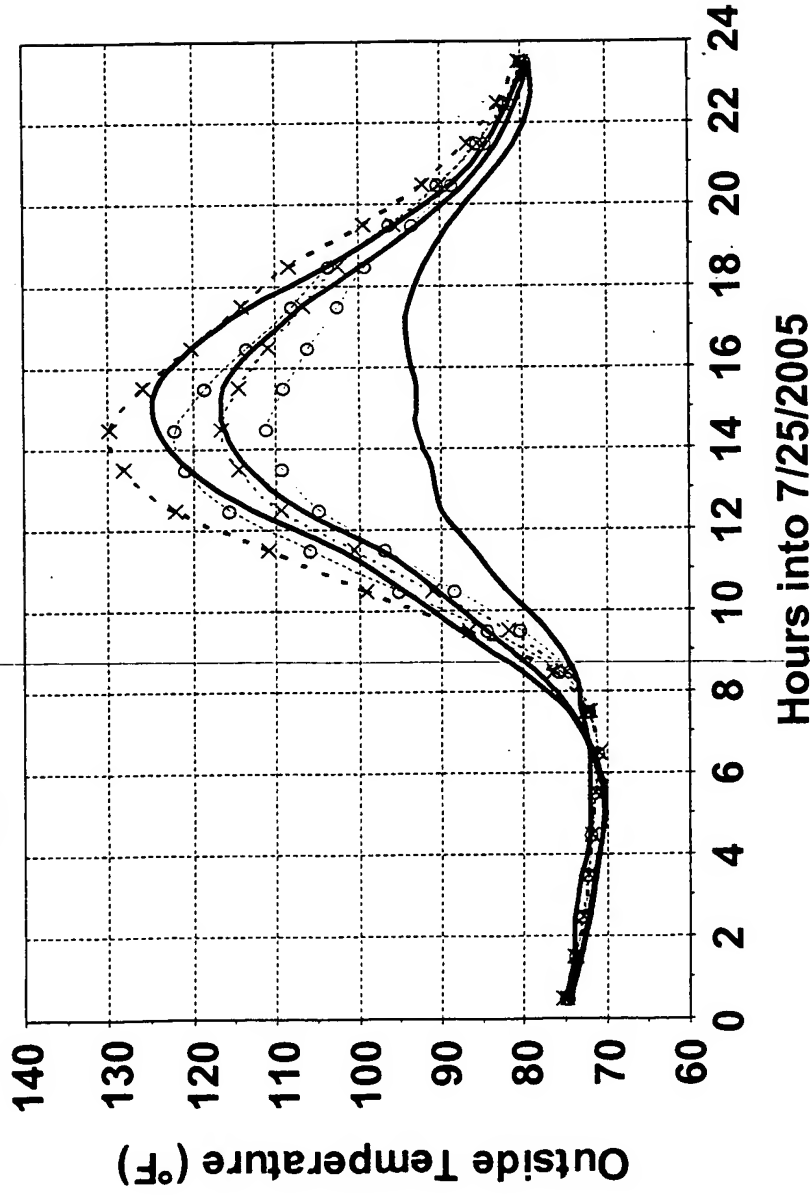

- DOE 2.2 peak behavior vs measurements not as regular as for 4/16/05
- Ground reflectance of 24% (dry grass) closer than 8% (dark soil) for this summer day.

# Model Generalizations

- Building America Performance Analysis Resources at [http://www.eere.energy.gov/buildings/building\\_america/pa\\_resources.html](http://www.eere.energy.gov/buildings/building_america/pa_resources.html) gives energy use profiles for three occupants (3 BR home). Choose to heat and cool with air-to-air heat pump (76°F cooling; 68°F heating; no setup or setback)
- Choose seven different climates to show response of typical house to cooling and mixed climates of interest

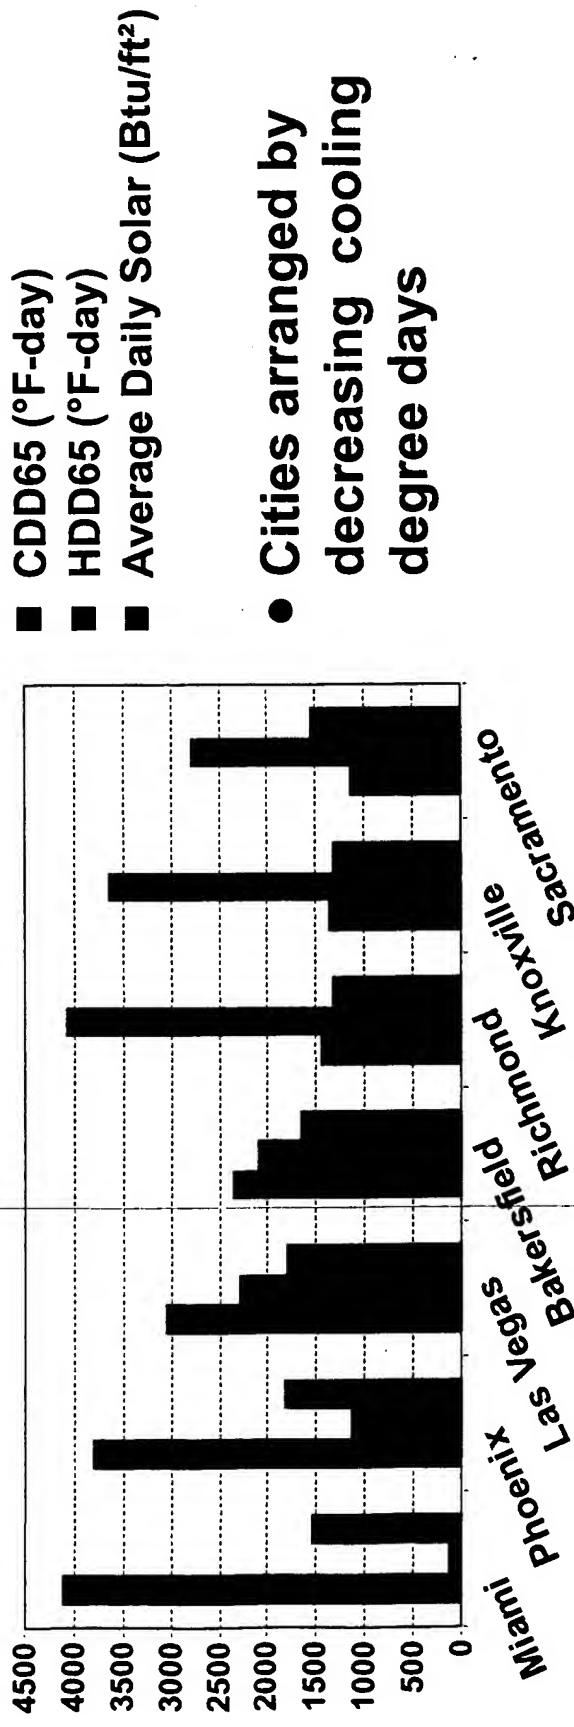


OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY






# Model Generalizations

- Ranch house with non-IR reflecting coating on walls shows variation in heating and cooling energy use that is consistent with climate variation

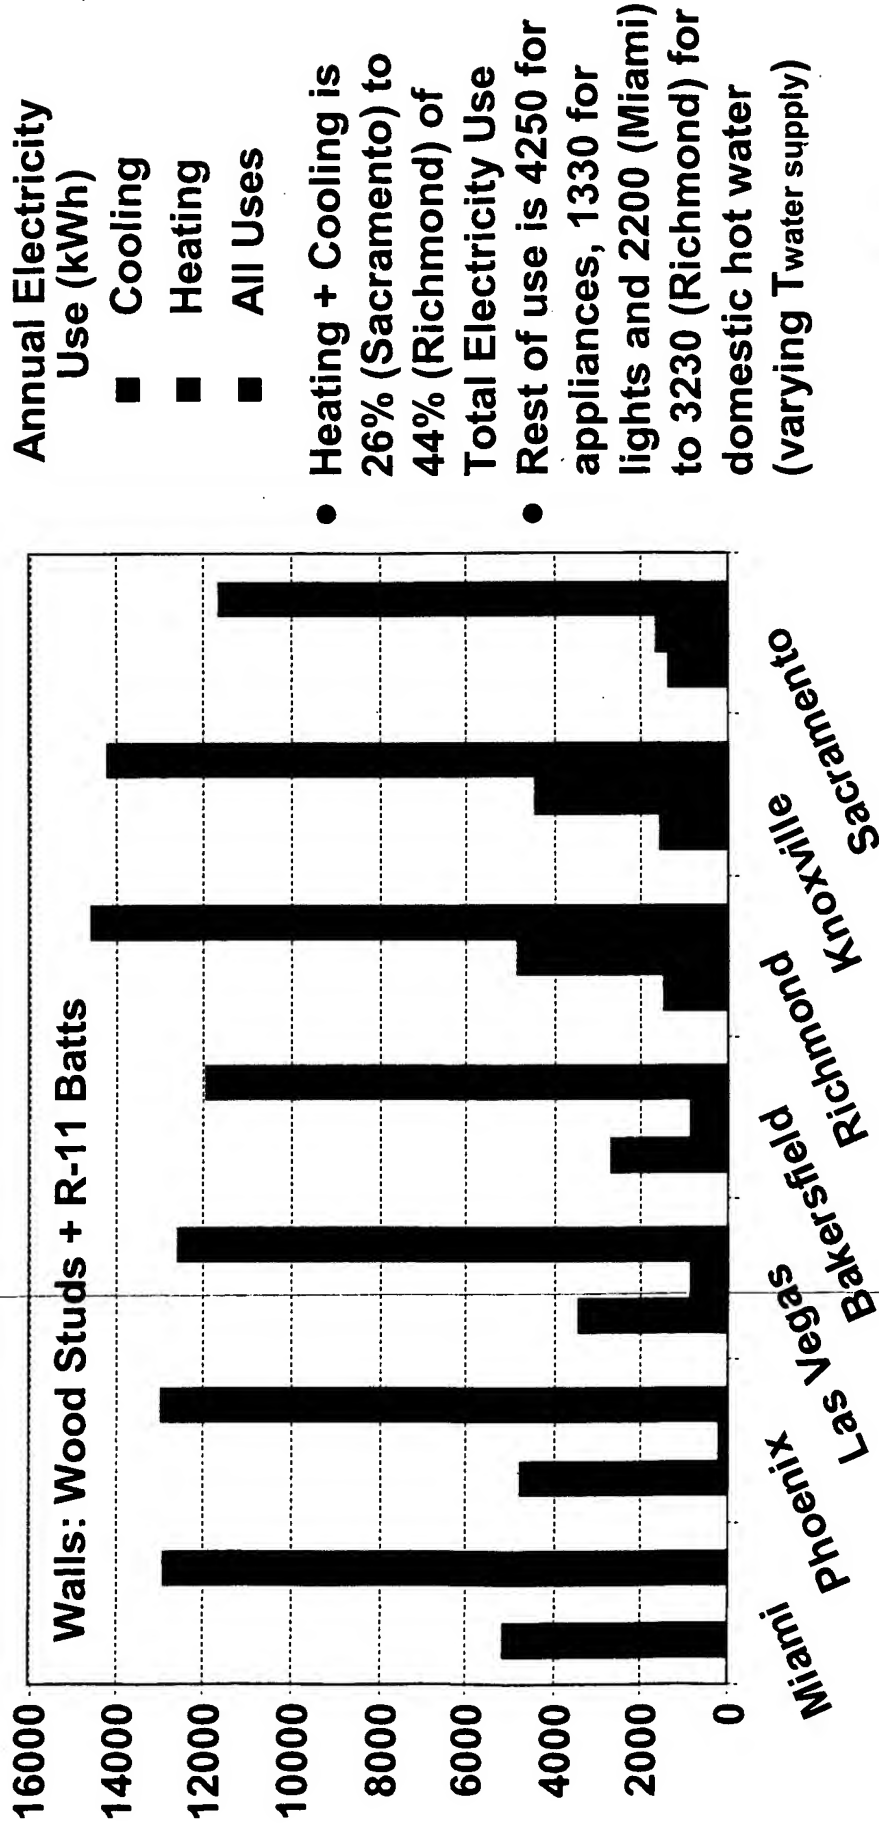


# Model Generalizations

- Alternate wall configuration of interest for cooling climates. Keep attic and floor insulation levels for consistency

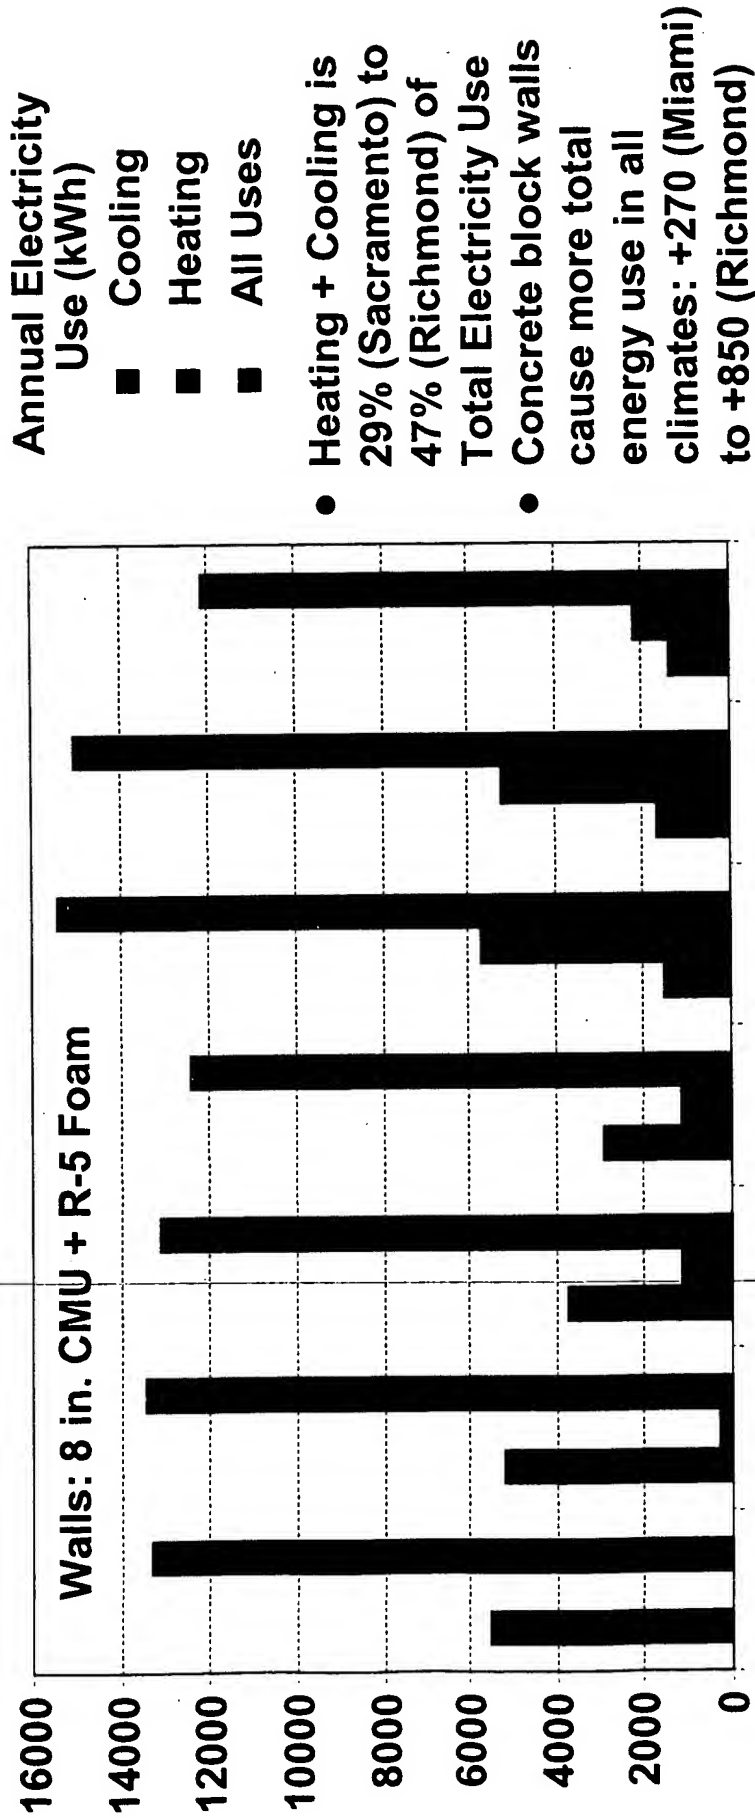


# Model Generalizations

- IR reflective coating on conventional walls saves cooling energy. Savings are 4% to 9% compared to non-IR reflecting walls

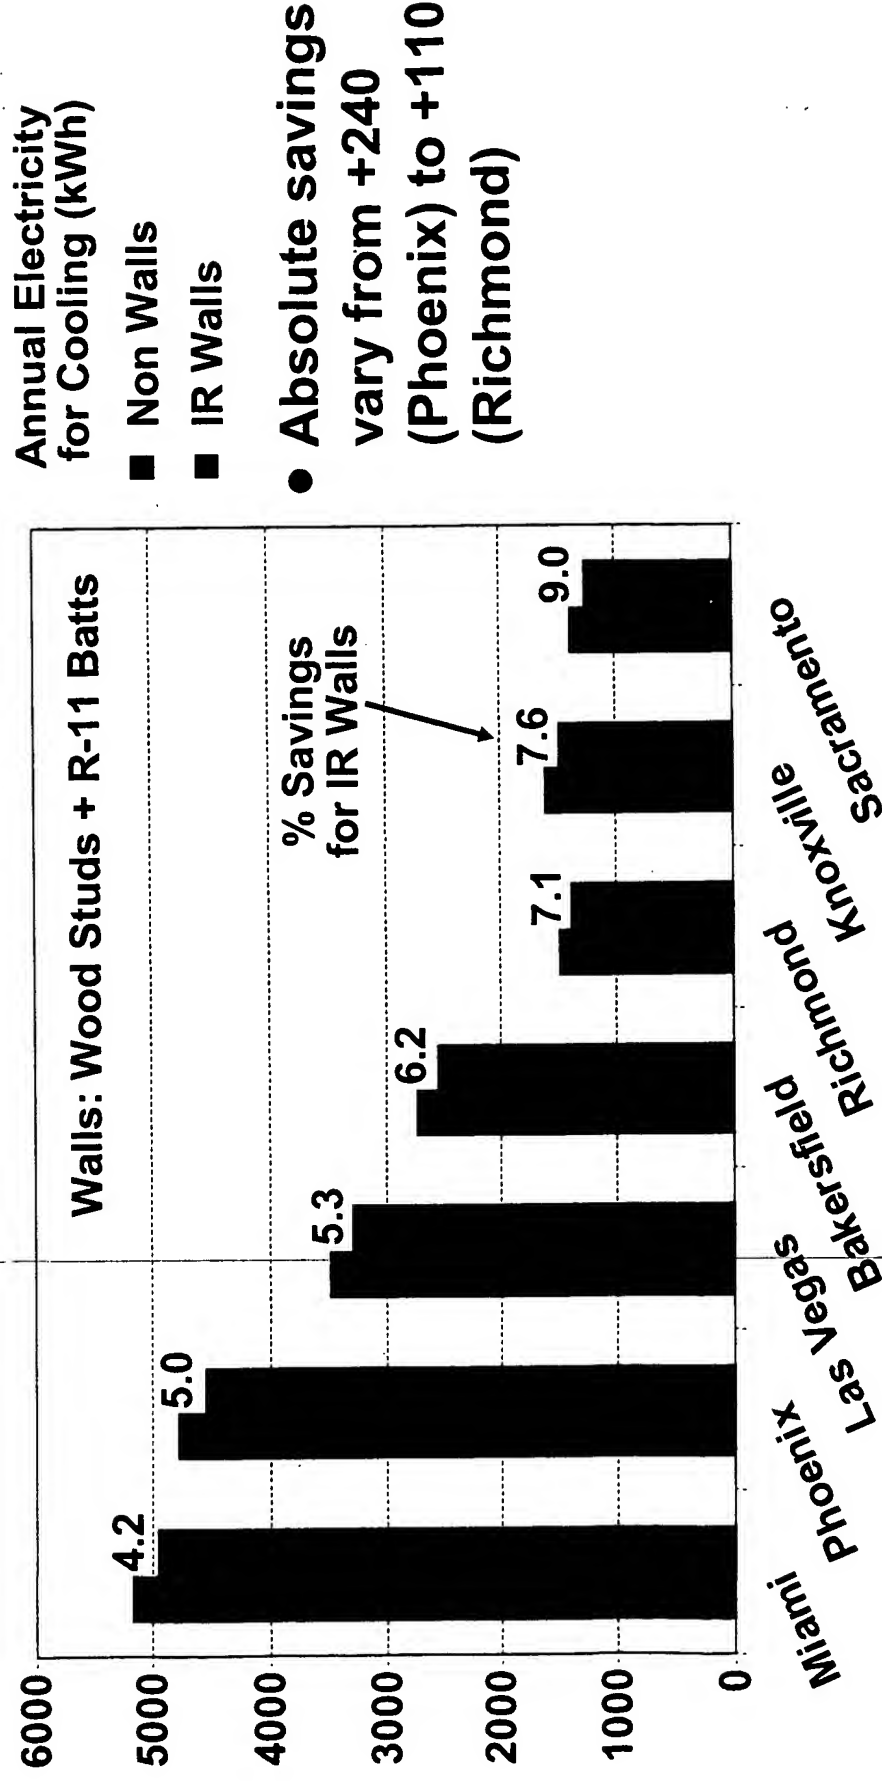

# Model Generalizations


- IR reflective coating on CMU walls shows larger savings of cooling energy. Savings are 6% to 13% compared to cooling energy with non-IR reflecting walls

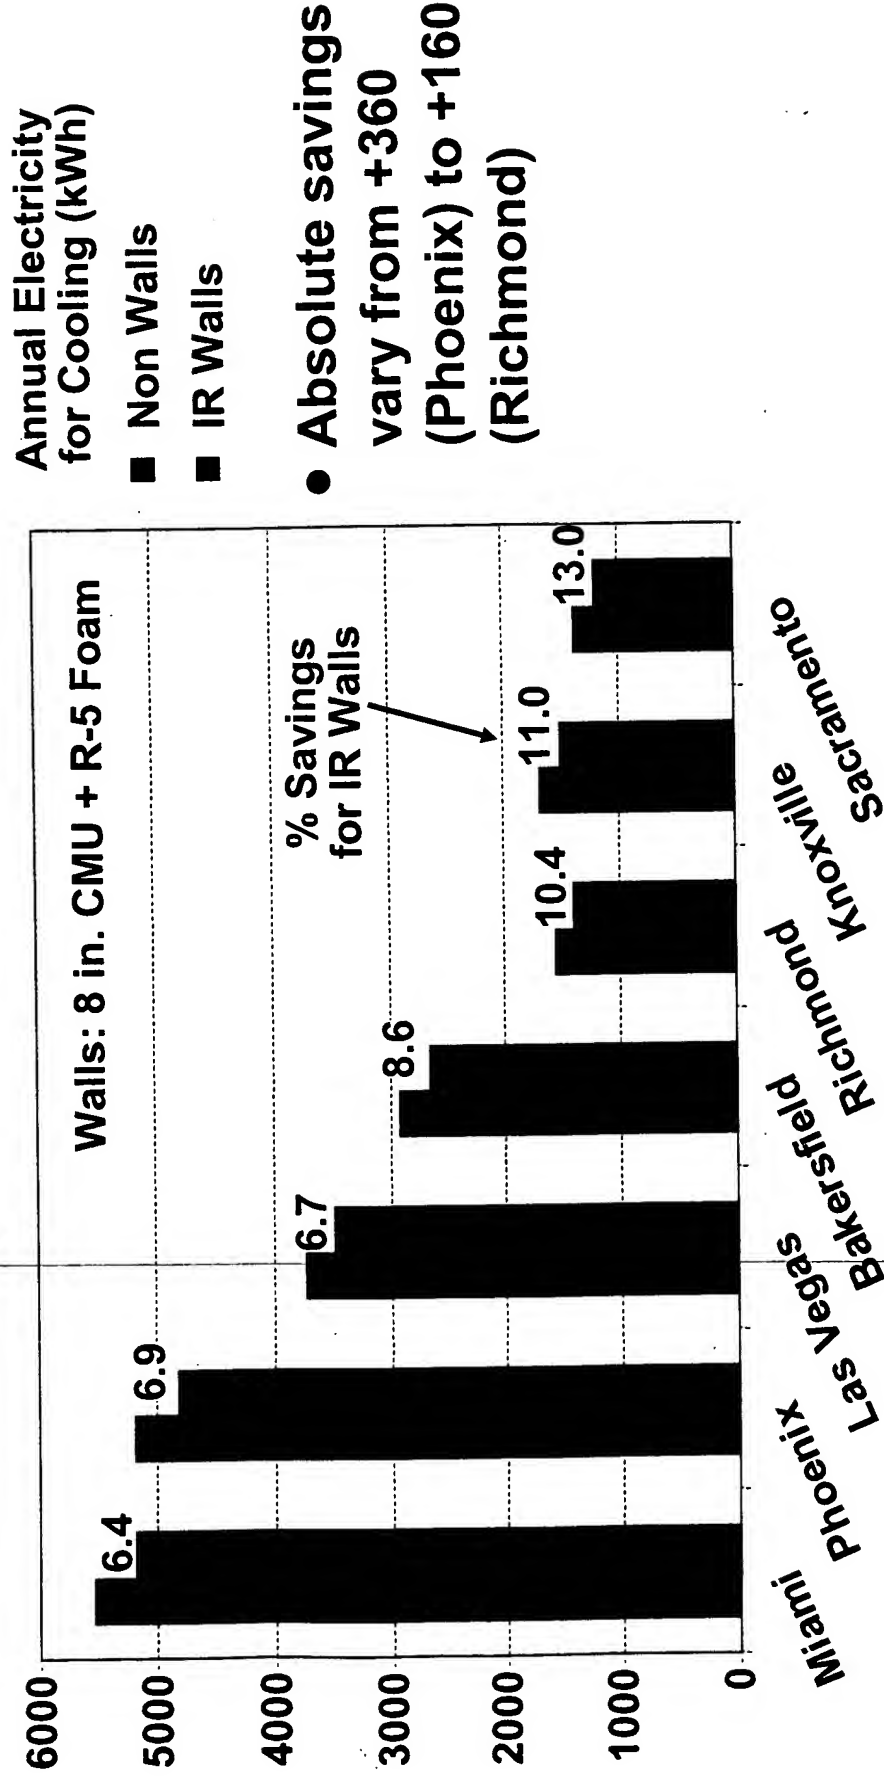

# **Project Summary**

- Demo sites in Phoenix and Jacksonville depict energy savings
- Full year of ORNL data validated DOE 2.2 model
- Complexity of real wall applications (different orientations, shading and construction) makes generalization very difficult
- DOE 2.2 whole building annual energy estimates for ranch house show that IR reflecting pigments save 4% to 13% of cooling energy

# • Cooling a 1100 ft<sup>2</sup> ranch house in various climates

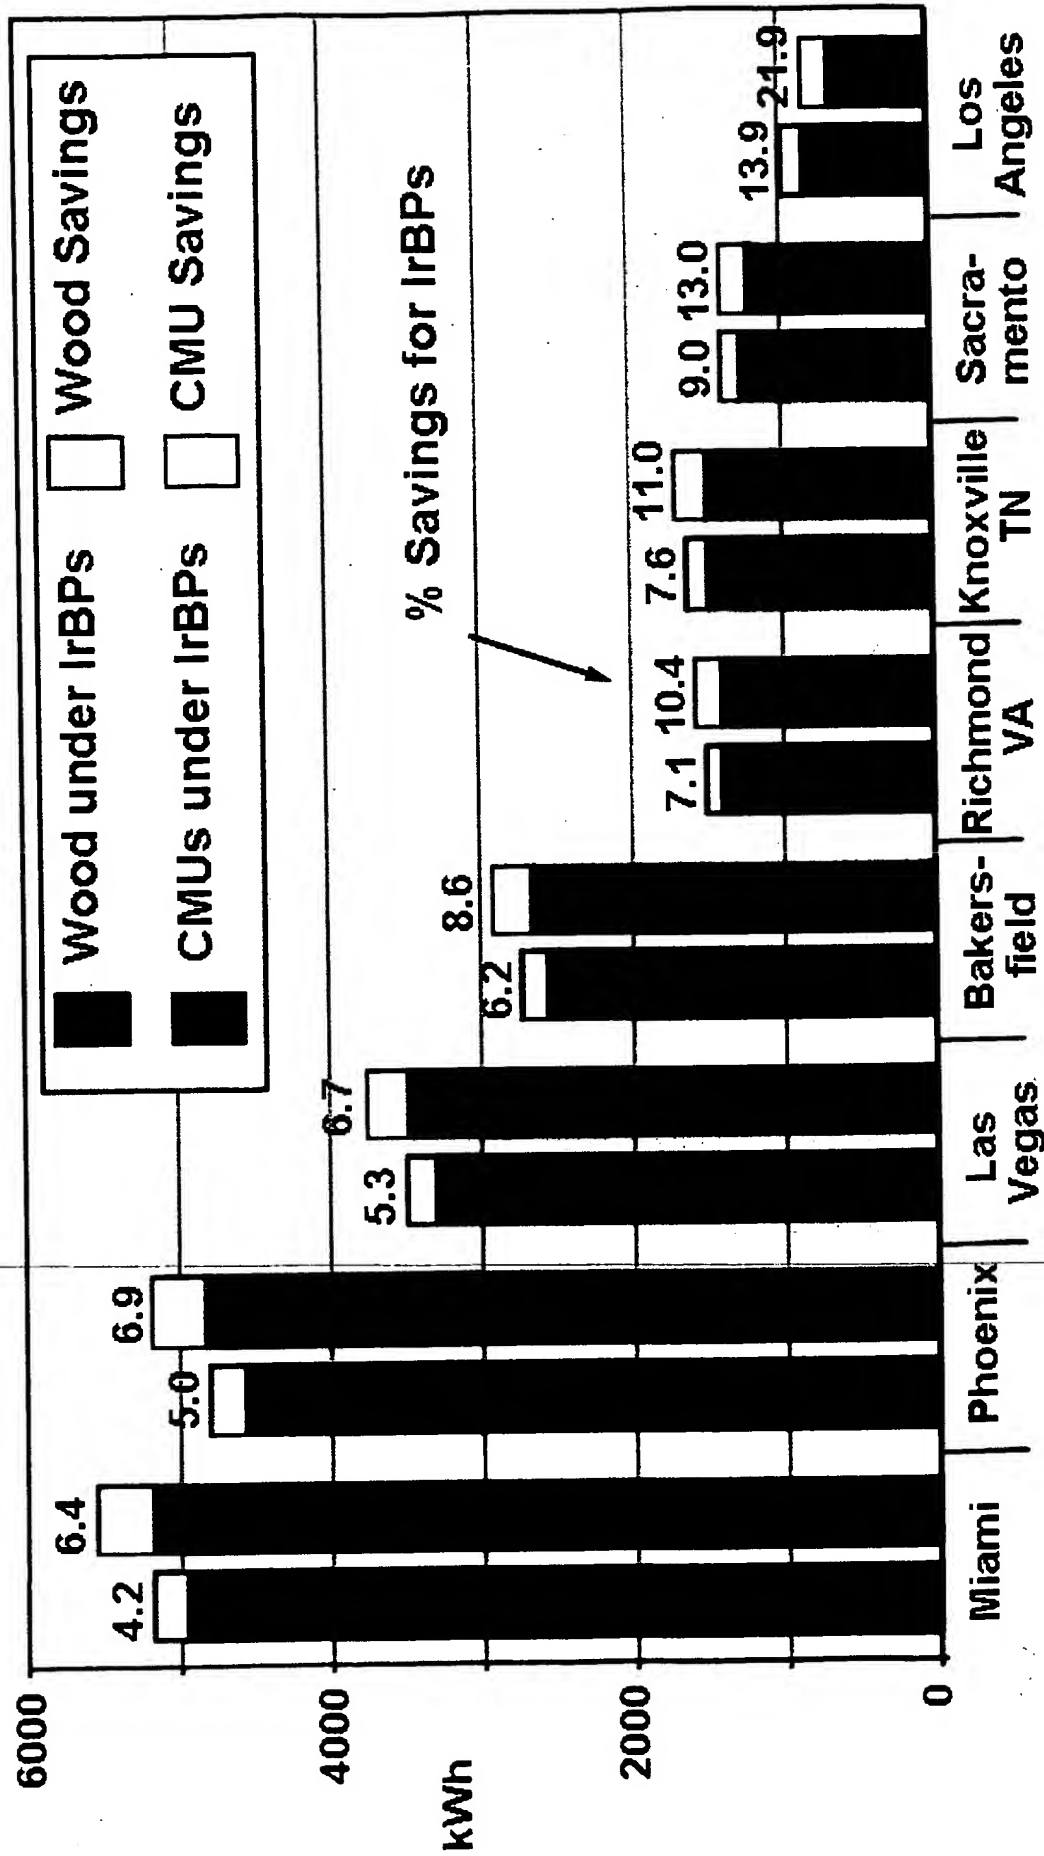



# Field Tests of Cool Walls in Cooling and Mixed Climates

Questions or comments?

OAK RIDGE NATIONAL LABORATORY  
U. S. DEPARTMENT OF ENERGY

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**